
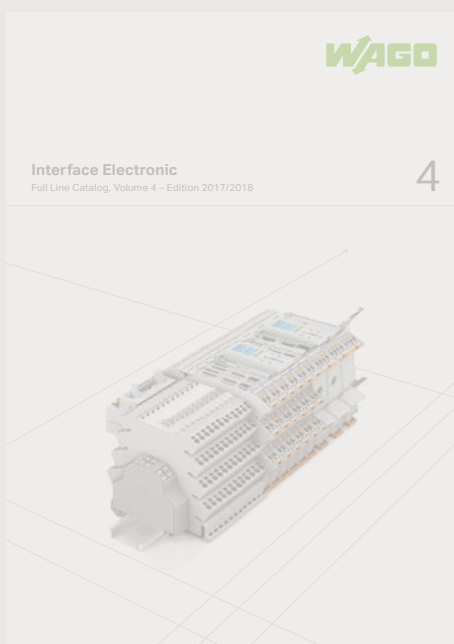


Electrical Interconnection

Supplementary Catalog to Full Line Catalogs, Volumes 1/2/5/6

Edition 2018/1

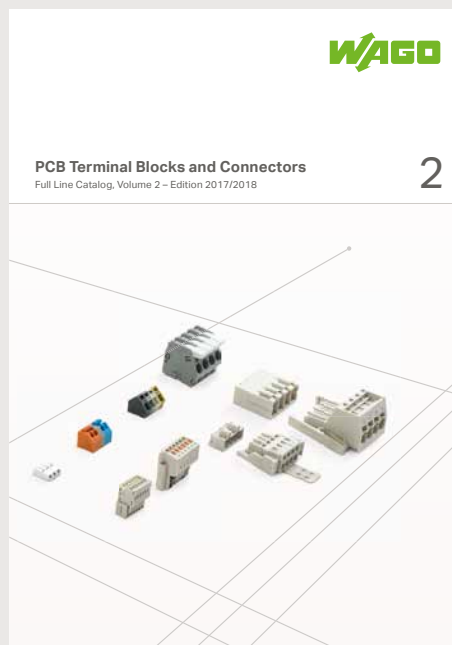

The new items in this catalog
supplement products found in
the following main catalogs

N 1/2/5/6

Volume 6
Marking



Volume 5

WINSTA® - The Pluggable Connection System




Volume 2

PCB Terminal Blocks and Connectors





Volume 1

Rail-Mounted Terminal Block Systems

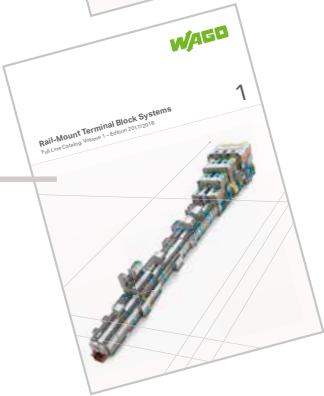

Contents

			Page
	Rail-Mount Terminal Block Systems	Volume 1	4
	PCB Terminal Blocks and Pluggable Connectors	Volume 2	14
	WINSTA® – The Pluggable Connection System	Volume 5	60
	Marking Accessories	Volume 6	64
	Item Number Index		68

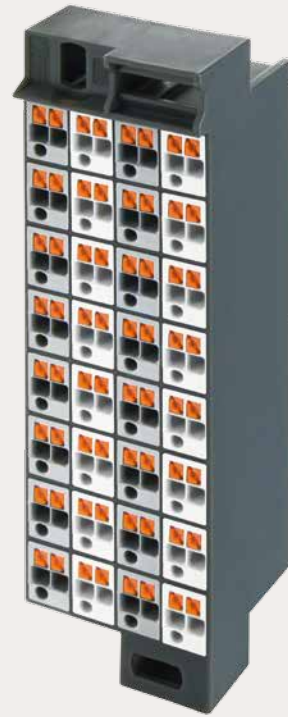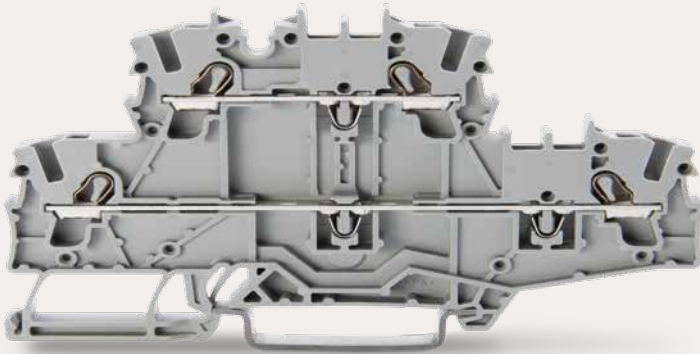

Volume 1, Rail-Mount Terminal Block Systems

Volume 1, Rail-Mount Terminal Block Systems

Contents

			Page
	TOPJOB® S Accessories, Jumpers	282, 2009 Series	4
	TOPJOB® S Component Plugs on Carrier Terminal Blocks 2.5 (4) mm²	2042 Series	5
	TOPJOB® S Multilevel Installation Terminal Blocks 2.5 (4) mm²	2002 Series	7
	X-COM®-SYSTEM 2-Conductor/1-Pin Double-Deck Carrier Terminal Blocks 2.5 (4 "f-st") mm²	870 Series	8
	Matrix Patchboards with Push-Buttons, 32-Pole – Slimline Version, for 19" Racks	726 Series	9
	L-BOXX Splicing Connector Sets	887 Series	10
	COMPACT Splicing Connectors for All Conductor Types 6 mm²	221 Series	13

1

[illegible]

TOPJOB® S**Component Plug on Carrier Terminal Block 2.5 (4) mm²****2042 Series**

1



- ❶ Length of 2002-1661: 66.5 mm / 2.62 inch
2-conductor carrier terminal block
- ❷ Length of 2002-1761: 76.8 mm / 3.02 inch
3-conductor carrier terminal block
- ❸ Length of 2002-1861: 87.5 mm / 3.45 inch
4-conductor carrier terminal block
- ❹ Length of 2002-1961: 72.9 mm / 2.87 inch
2-conductor carrier terminal block with additional
jumper slot
- ❺ See application notes in our Full Line Catalog, Volume 1.
Colored push-in type jumper bar
Staggered jumper
Push-in type wire jumper

Item No.	Pack. Unit	Item No.	Pack. Unit
Component plug; 4-pole; transparent housing; with fiber optics; 10.3 mm wide		Component plug; 6-pole; transparent housing; with fiber optics; 15.5 mm wide	
2042-321	5	2042-331	5
Component plug; 8-pole; transparent housing; with fiber optics; 20.7 mm wide		Component plug; 10-pole; transparent housing; with fiber optics; 25.9 mm wide	
2042-341	5	2042-351	5

Accessories for carrier terminal blocks

Appropriate marking systems: WMB/Mini-WSB/Marker Strips
(see Full Line Catalog, Volume 1, Section 13)

❶ 2-conductor carrier terminal block; 0.25 ... 2.5 (4) mm ² / 22 ... 12 AWG 5.2 mm / 0.205 inch wide gray 2002-1661 50	❺ Push-in type wire jumper; insulated; I _N 18 A; 1.5 mm ² conductor cross-section L = 60 mm 2009-412 100 (10x10) L = 110 mm 2009-414 100 (10x10) L = 250 mm 2009-416 100 (10x10)	❺ Staggered jumper; insulated; I _N 25 A; light gray 2-way 2002-472 100 3-way 2002-473 100 4-way 2002-474 100 5-way 2002-475 25 6-way 2002-476 25 7-way 2002-477 25 8-way 2002-478 25 9-way 2002-479 25 10-way 2002-480 25 11-way 2002-481 25 12-way 2002-482 25
End and intermediate plate; 1 mm thick orange 2002-1692 100 (4x25) gray 2002-1691 100 (4x25)		
❷ 3-conductor carrier terminal block; 0.25 ... 2.5 (4) mm ² / 22 ... 12 AWG 5.2 mm / 0.205 inch wide gray 2002-1761 50	❺ Push-in type jumper bar; insulated; I _N 25 A; light gray 2-way 2002-402 25 3-way 2002-403 25 4-way 2002-404 25 5-way 2002-405 25 6-way 2002-406 25 7-way 2002-407 25 8-way 2002-408 25 9-way 2002-409 25 10-way 2002-410 25	
End and intermediate plate; 1 mm thick orange 2002-1792 100 (4x25) gray 2002-1791 100 (4x25)		
❸ 4-conductor carrier terminal block; 0.25 ... 2.5 (4) mm ² / 22 ... 12 AWG 5.2 mm / 0.205 inch wide gray 2002-1861 50		WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm plain 793-5501 5
End and intermediate plate; 1 mm thick orange 2002-1892 100 (4x25) gray 2002-1891 100 (4x25)	❺ Push-in type jumper bar; insulated; I _N 25 A; light gray 1 to 3 2002-433 25 1 to 4 2002-434 25 1 to 5 2002-435 25 1 to 6 2002-436 25 1 to 7 2002-437 25 1 to 8 2002-438 25 1 to 9 2002-439 25 1 to 10 2002-440 25	WMB Multi marking system; plain; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm yellow 793-5501/000-002 red 793-5501/000-005 blue 793-5501/000-006 gray 793-5501/000-007 orange 793-5501/000-012 light green 793-5501/000-017 green 793-5501/000-023 violet 793-5501/000-024
❹ 2-conductor carrier terminal block; 0.25 ... 2.5 (4) mm ² / 22 ... 12 AWG 5.2 mm / 0.205 inch wide gray 2002-1961 50		
End and intermediate plate; 1 mm thick orange 2002-1992 100 (4x25) gray 2002-1991 100 (4x25)		
Protective warning marker; with black high-voltage symbol; for 5 terminal blocks yellow 2002-115 100 (4x25)		

TOPJOB® S

Multilevel Installation Terminal Block

2.5 (4) mm²; 2003 Series

0.25 ... 2.5 (4) mm² ❶ | 22 ... 12 AWG


250 V/4 kV/3; 10 A ❷❸

400 V/6 kV/3; 10 A ❷❹

Terminal block width: 5.2 mm / 0.205 inch

10 ... 12 mm / 0.39 ... 0.47 inch

3

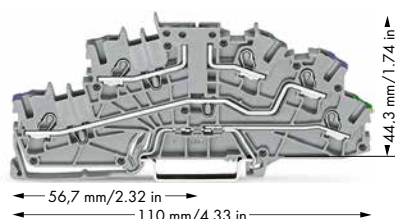

❶ Conductor range: 0.25 ... 4 mm² "s + f-st";
Push-in termination: 0.75 ... 4 mm² "s"
and 0.75 ... 2.5 mm²
"insulated ferrules, 12 mm"

❷ 250 V/
400 V = rated voltage
4 kV/
6 kV = rated surge voltage
3 = pollution degree
(see Full Line Catalog, Volume 1, Section 14)



❸ 250 V/4 kV potential - ground

❹ 400 V/6 kV potential - potential

Item No.	Pack. Unit		
Multilevel installation terminal block; carrier terminal block without knife disconnect; blue middle-deck, green-yellow lower-deck printing; gray			
Maximum current depends on accessories used.			
○ L/N/PE	2003-6661	50	
Item-Specific Accessories			
N/L-test plug adapter; for vertical test slot; gray			
	2-pole	2003-499	100 (4x25)
N-test plug adapter; for vertical test slot; gray			
	1-pole	2003-500	100 (4x25)
End and intermediate plate; for use without fuse plug; 0.8 mm thick			
	orange	2003-6692	100 (4x25)
Fuse plug with pull-tab; for (5 x 20) mm miniature metric fuses			
Electrical ratings are given by the fuse.			
	gray	2004-911	50
End and intermediate plate; only for use with fuse plugs; 1 mm thick			
	orange	2003-6693	100 (4x25)
Double-fuse plug; for (5 x 20) mm miniature metric fuses			
Electrical ratings are given by the fuse.			
	gray	2003-911	25
Double-fuse plug; for (5 x 20) mm miniature metric fuse; with LED; gray			
Electrical ratings are given by the fuse and blown fuse indication. Leakage current in case of a blown fuse: LED 0.25 mA			
	gray	2003-911/1000-923	25
End and intermediate plate; 1 mm thick; only for use with double-fuse plugs			
	orange	2003-6694	100 (4x25)

X-COM®-SYSTEM**2-Conductor/1-Pin Double-Deck Carrier Terminal Block****2.5 (4 "f-st") mm²; 870 Series**

0.08 ... 2.5 (4 "f-st") mm ² ❶ 28 ... 12 AWG 500 V/6 kV/3 ❷ I _N 16 A Terminal block width: 5 mm / 0.197 inch 6 ... 7 mm / 0.24 ... 0.28 inch	0.08 ... 2.5 (4 "f-st") mm ² ❶ 28 ... 12 AWG Terminal block width: 5 mm / 0.197 inch 6 ... 7 mm / 0.24 ... 0.28 inch
--	---



❶ Max. insulation diameter: 4.4 mm

❷ 500 V = Rated voltage
6 kV = Rated surge voltage
3 = Pollution degree

(see Full Line Catalog, Volume 1, Section 14)

❸ See application notes in our Full Line Catalog, Volume 1.
Insulation stop

❹ Note: 2-conductor female plugs cannot be used.


6

Item No.	Pack. Unit	Item No.	Pack. Unit	Accessories	
2-conductor/1-pin double-deck carrier terminal block; through/through terminal block; gray housing		4-conductor/2-pin double-deck carrier block; 4-conductor/2-pin ground conductor block; internally commoned; green-yellow housing		Appropriate marking systems: Mini-WSB/WMB	
 L/L	870-1131	50	 PE	870-1137	50
4-conductor/2-pin double-deck carrier terminal block; 4-conductor/2-pin through terminal block; internally commoned; violet conductor entry; gray housing					
 L	870-1138	50			
				Push-in type jumper bar; insulated; I _N 18 A; light gray	
					1-3-5 870-405/011-000 1-3-5-7 870-407/011-000 200 (8x25)
					1-3-5-7-9 870-409/011-000 100 (4x25)
				Delta jumper; insulated; I _N 18 A; light gray	
					1-2 3-4 5-6 870-406/020-000 100 (4x25)
Accessories					
Appropriate marking systems: Mini-WSB/WMB					
End and intermediate plate; 1 mm thick		Push-in type jumper bar; insulated; I _N 18 A; light gray			
	orange 870-1149 100 (4x25) gray 870-1148 100 (4x25)		2-way 870-402 200 (8x25) 3-way 870-403 200 (8x25) 4-way 870-404 100 (4x25) 5-way 870-405 100 (4x25) 6-way 870-406 100 (4x25) 7-way 870-407 100 (4x25) 8-way 870-408 100 (4x25) 9-way 870-409 100 (4x25) 10-way 870-410 50 (2x25)		
Insulation stop; 5 pcs/strip; 0.08 ... 0.2 mm ² "s" (0.14 mm ² "f-st")					
	white 280-470 200 (8x25)				
Insulation stop; 5 pcs/strip; 0.25 ... 0.5 mm ²					
	light gray 280-471 200 (8x25)				
Insulation stop; 5 pcs/strip; 0.75 ... 1 mm ²		Push-in type jumper bar; insulated; I _N 18 A; light gray			
	dark gray 280-472 200 (8x25)		1 to 3 870-433 200 (8x25) 1 to 4 870-434 200 (8x25) 1 to 5 870-435 100 (4x25) 1 to 6 870-436 100 (4x25) 1 to 7 870-437 100 (4x25) 1 to 8 870-438 100 (4x25) 1 to 9 870-439 100 (4x25) 1 to 10 870-440 50 (2x25)		
Coding pin; for coding female plugs					
	orange 769-435 100 (4x25)				
Pin cover; with Mini-WSB marker slot					
	gray 769-438 100 (4x25) orange 769-439 100 (4x25)				
1-conductor female plug; angled					
	gray 769-101/022-000 200				
1-conductor female plug; straight					
	gray 769-101 200				

Matrix Patchboard with Push-Buttons; 32-Pole – Slimline Version; for 19" Racks


726 Series

Side 1: 32 x 0.08 ... 1.5 mm ²	28 ... 16 AWG	Side 1: 32 x 0.08 ... 1.5 mm ²	28 ... 16 AWG
Side 2: 32 x 0.08 ... 1.5 mm ²	28 ... 16 AWG	Side 2: 32 x 0.08 ... 1.5 mm ²	28 ... 16 AWG
800 V/8 kV/3 ①		800 V/8 kV/3 ①	
I _N 10 A		I _N 10 A	
 10 mm / 0.39 inch		 10 mm / 0.39 inch	




- ① 500 V = Rated voltage
8 kV = Rated surge voltage
3 = Pollution degree
(see Full Line Catalog, Volume 1, Section 14)
- ② See application notes in our Full Line Catalog, Volume 1.
Decade marker carrier

Item No.	Pack. Unit	Item No.	Pack. Unit	Matrix Patchboard Accessories
Matrix patchboard; dark gray frame; blue modules; for 19" racks		Matrix patchboard; dark gray frame; blue modules; for 19" racks		
 without marking 726-800	30	 Marking 1 ... 32 726-801	30	Wire commoning chain; insulated; 32 connections; I _N 6 A; max. 50 V; 0.5 mm ²
Matrix patchboard; dark gray frame; white/gray modules; vertical module marking on sides 1 and 2; for 19" racks				 gray 709-107 1
without marking 726-780	30			WMB Inline; plain; stretchable from 5 ... 5.2 mm; 1,500 WMB markers (5 mm) per reel
				 white 2009-115 1
				Marking strip; plain; 11 mm wide; 50 m reel
				 white 2009-110 1
				WMB Multi marking system; white; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm
				plain 793-5501 5
				WMB Multi marking system; plain; 10 strips with 10 markers/card; stretchable from 5 ... 5.2 mm
				yellow 793-5501/000-002
				red 793-5501/000-005
				blue 793-5501/000-006
				gray 793-5501/000-007
				orange 793-5501/000-012
				light green 793-5501/000-017
				green 793-5501/000-023
				violet 793-5501/000-024 5
				Decade marker carrier; for matrix patchboards
				 dark gray 726-905 10
				Operating tool with a partially insulated shaft; type 1; (2.5 x 0.4) mm blade
				 210-719 1
				Test probe; 2 mm Ø; min. 12 mm lon; uninsulated tip; not offered by WAGO (e.g., MultiContact XPP-80/2-16)

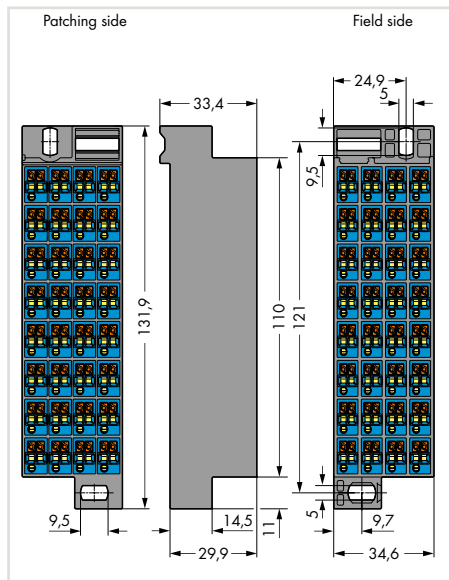

Dimensions (in mm):

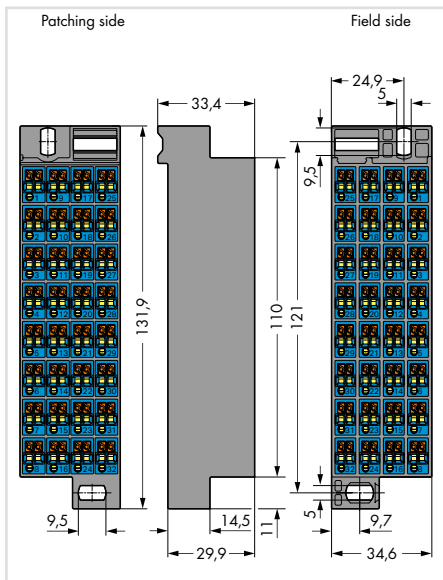

Dimensions (in mm):

Splicing Connector Set

887 Series

Splicing Connector Set	Splicing Connector Set	Splicing Connector Set
------------------------	------------------------	------------------------

[illegible]

Splicing Connector Set	Splicing Connector Set	Splicing Connector Set
------------------------	------------------------	------------------------




12

COMPACT Splicing Connectors for All Conductor Types

221 Series


Description and Installation

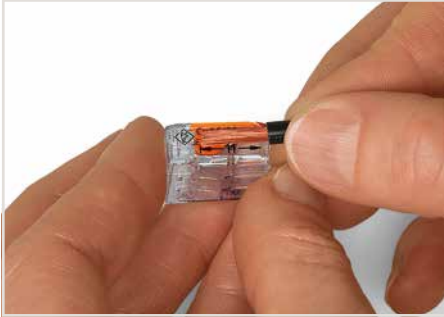


Strip conductor to 11 mm (0.43 inch).



Termination: Lift the lever to open the clamping unit and insert a stripped conductor.

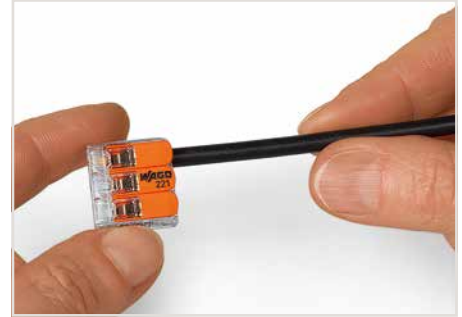

Then, lower the lever to close the clamp.

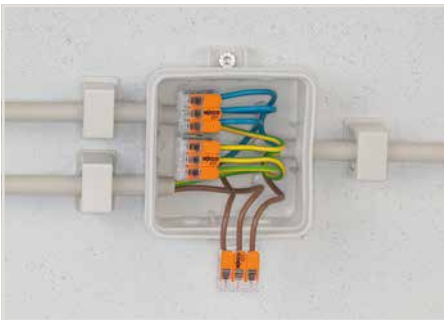

Wiring fine-stranded conductors in a junction box.



Custom low-voltage lighting systems



Wiring fine-stranded conductors in a junction box.



Lighting distribution in ceiling canopy



Pendant light connection in suspended ceilings

CAGE CLAMP®
terminates the following
copper conductors:

solid stranded

fine-stranded,
also with tinned
single strands

fine-stranded,
tip-bonded

COMPACT Splicing Connectors for All Conductor Types


6 mm²; 221 Series

0.5 ... 6 mm ² 450 V/4 kV/2 ① I _N 41 A	20 ... 10 AWG	0.5 ... 6 mm ² 450 V/4 kV/2 ① I _N 41 A	20 ... 10 AWG
12 ... 14 mm / 0.47 ... 0.55 inch		12 ... 14 mm / 0.47 ... 0.55 inch	




- ① In grounded power lines
450 V = Rated voltage
4 kV = Rated surge voltage
2 = Pollution degree
(see Full Line Catalog, Volume 1, Section 14)

Item No.	Pack. Unit	Item No.	Pack. Unit
COMPACT PUSH WIRE® connector for junction boxes; 2-wire connector; with levers; continuous operating temperature (max.): 105°C; ambient temperature (max.): 85°C (T85)		COMPACT PUSH WIRE® connector for junction boxes; 3-wire connector; with levers; continuous operating temperature (max.): 105°C; ambient temperature (max.): 85°C (T85)	
221-612	500 (10x50)	221-613	300 (10x30)

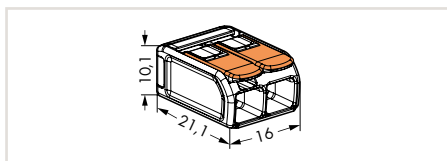

Dimensions in mm

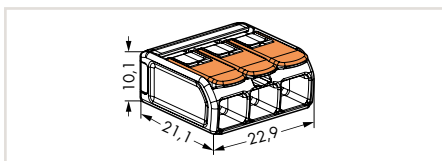

Dimensions in mm



Compact, lever-operated splicing connectors:
They connect up to five stripped conductors from 0.5 to 6 mm² (20–10 AWG) – without tools!

How these work:

Pull up one of the orange operating levers to open the clamping unit. Then insert the conductor and push the lever back down, flush with the connector housing.

Safety:


The specially designed rest position of the lever reliably prevents accidental unclamping of a connected conductor. Application safety, for any type of conductor (solid, stranded, fine-stranded), is confirmed by approvals like ENEC or UL.

ENEC is the European mark for electrical products that demonstrates compliance with European safety standards. The ENEC mark is subjected to the same EN standards as the VDE mark.


While the VDE mark is only permitted in Germany, the ENEC mark is accepted in more than 20 European countries.



Item No.	Pack. Unit	Item No.	Pack. Unit	
Mounting carrier; for 2-, 3- and 5-conductor splicing connectors; 19.3 mm wide; 28.3 mm high; 94.2 mm deep		COMPACT PUSH WIRE® connector for junction boxes; 5-wire connector; with levers; continuous operating temperature (max.): 105 °C; ambient temperature (max.): 85 °C (T85)		
 orange	221-510	50 (5x10)	221-615	150 (10x15)
Accessories; item-specific				
Self-adhesive marking strips; 5 mm high; 48 self-adhesive strips per card; plain				
 white	210-334	100		

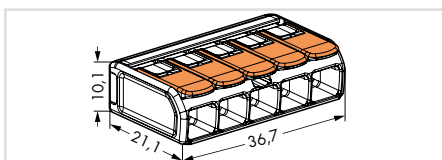

Dimensions in mm

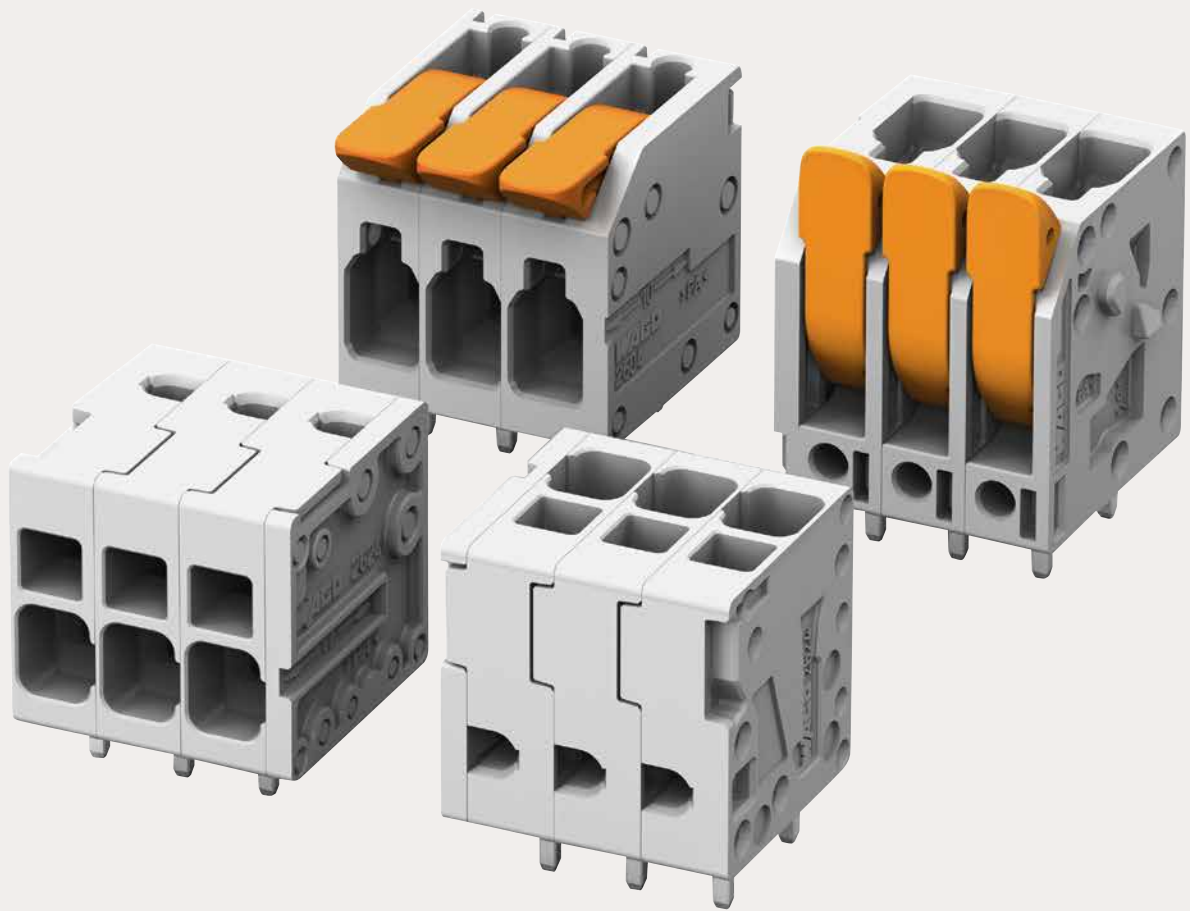

Volume 2, PCB Terminal Blocks and Connectors


Volume 2, PCB Terminal Blocks and Connectors

Contents

		Nominal Cross-Section	Series	Page
	PCB Terminal Blocks with Levers; Push-in CAGE CLAMP®	4 mm ²	2604	16
		6 mm ²	2606	20
		16 mm ²	2616	24
	PCB Terminal Blocks with Screwdriver Actuation; Push-in CAGE CLAMP®	4 mm ²	2624	28
		6 mm ²	2626	32
		16 mm ²	2636	36
	Through-Board SMD PCB Terminal Blocks; Push-in CAGE CLAMP®	0.75 mm ²	2070	40
	SMD PCB Terminal Blocks; Push-in CAGE CLAMP®; PUSH WIRE®	0.75 mm ²	2065	46
	Board-to-Board Links for SMD PCB Terminal Blocks		2059	48
			2061	50
	MCS – MULTI CONNECTION SYSTEM MAXI 16 Female Connectors; Push-in CAGE CLAMP®	16 mm ²	832	52
	MCS – MULTI CONNECTION SYSTEM MAXI 16 THT Male Headers		832	54
	MCS – MULTI CONNECTION SYSTEM MAXI 16 Male Connectors; Push-in CAGE CLAMP®	16 mm ²	832	56
	MCS – MULTI CONNECTION SYSTEM MAXI 6 Snap-In Frames		831	58
	Lockout Pins for Snap-In Frames		831	59

PCB Terminal Block with Levers; 4 mm² Pin Spacing: 5 mm; 7.5 mm; 11.5 mm 2604 Series


1

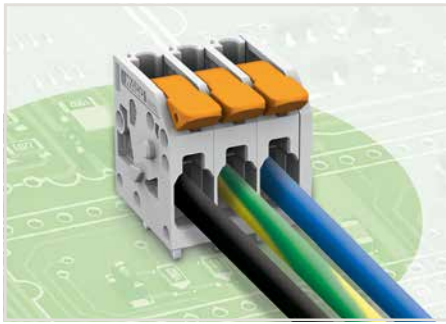

- PCB terminal block with lever-actuated Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously – convenient for terminating multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

Current-Carrying Capacity Curve

Pin spacing: 5 mm / Conductor cross-section: 4 mm² "f-st"
Based on: EN 60512-5-2 / Reduction factor: 1

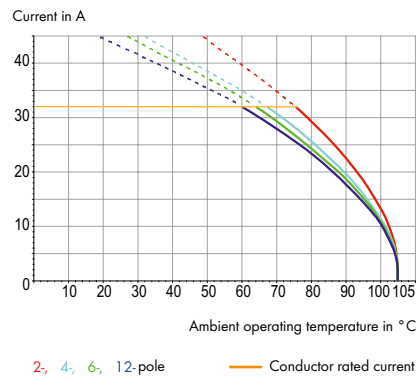

Electrical Data for Pin Spacing

	5 mm 0.197 inch	7.5 mm 0.295 inch	11.5 mm 0.453 inch
Ratings per*	IEC/EN 60664-1	IEC/EN 60664-1	IEC/EN 60664-1
Nominal voltage (III / 3)	320 V	630 V	1000 V
Rated impulse voltage (III / 3)	4 kV	6 kV	8 kV
Rated voltage (III / 2)	400 V	630 V	1000 V
Rated surge voltage (III / 2)	4 kV	6 kV	8 kV
Rated voltage (II / 2)	630 V	1000 V	1000 V
Rated surge voltage (II / 2)	4 kV	6 kV	8 kV
Rated current	32 A	32 A	32 A
Approvals per	UL 1059	UL 1059	UL 1059
Rated voltage UL (Use Group B)	300 V	300 V	600 V
Rated current UL (Use Group B)	20 A	20 A	20 A
Rated voltage UL (Use Group C)		300 V	600 V
Rated current UL (Use Group C)		20 A	20 A
Rated voltage UL (Use Group D)	300 V	600 V	
Rated current UL (Use Group D)	10 A	5 A	

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	9 ... 11 mm / 0.35 ... 0.43 inch
Conductor entry angle to the PCB	0°
Conductor cross-sections	
Solid conductor	0.2 ... 4 mm ² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 4 mm ² / 24 ... 12 AWG
Fine-stranded conductor with insulated ferrule	0.25 ... 2.5 mm ²
Fine-stranded conductor with uninsulated ferrule	0.25 ... 2.5 mm ²
Fine-stranded conductor, with twin ferrule	0.25 ... 1.5 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	0.8 x 1 mm
Drilled hole diameter	1.3 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

Additional technical information,
see Volume 2, Section 13

Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block with Levers; 4 mm²

Pin Spacing: 5 mm; 7.5 mm; 11.5 mm

2604 Series




Dimensions (in mm):

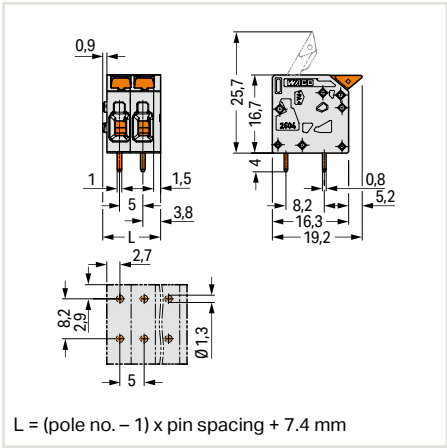

PCB terminal block with levers;
conductor entry parallel to PCB;
2 solder pins/pole; gray;
5 mm (0.197 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2604-1101	300
2	2604-1102	200
3	2604-1103	130
4	2604-1104	100
5	2604-1105	80
6	2604-1106	60
7	2604-1107	60
8	2604-1108	50
9	2604-1109	40
10	2604-1110	40
11	2604-1111	30
12	2604-1112	30


Dimensions (in mm):

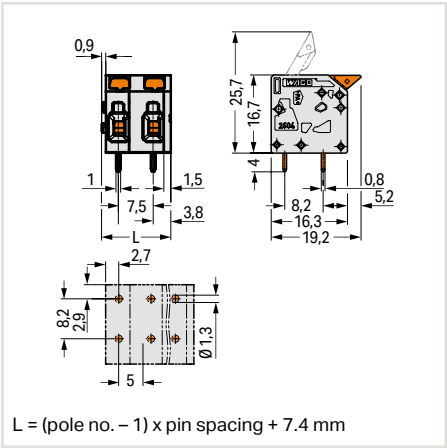

PCB terminal block with levers;
conductor entry parallel to PCB;
2 solder pins/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2604-1302	150
3	2604-1303	100
4	2604-1304	70
5	2604-1305	60
6	2604-1306	45
7	2604-1307	40
8	2604-1308	35
9	2604-1309	30
10	2604-1310	25
11	2604-1311	25
12	2604-1312	25

Dimensions (in mm):

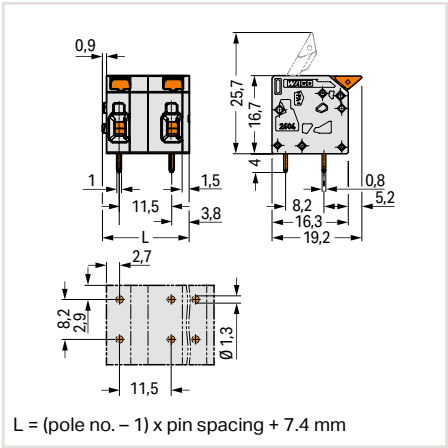

PCB terminal block with levers;
conductor entry parallel to PCB;
2 solder pins/pole; gray;
11.5 mm (0.453 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2604-1502	120
3	2604-1503	70
4	2604-1504	50
5	2604-1505	40
6	2604-1506	30
7	2604-1507	25
8	2604-1508	25
9	2604-1509	25
10	2604-1510	20
11	2604-1511	20
12	2604-1512	15

Available upon request (depending on quantity required):

- Other pole numbers
- Other colors
- Direct marking

PCB Terminal Block with Levers; 4 mm² Pin Spacing: 5 mm; 7.5 mm; 11.5 mm 2604 Series


1



- PCB terminal block with lever-actuated Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously – convenient for terminating multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

Current-Carrying Capacity Curve

Pin spacing: 5 mm / Conductor cross-section: 4 mm² "f-st"
Based on: EN 60512-5-2 / Reduction factor: 1

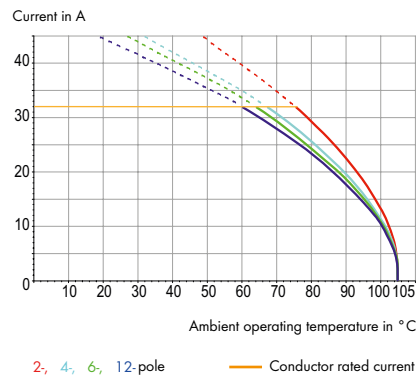

Electrical Data for Pin Spacing

	5 mm 0.197 inch	7.5 mm 0.295 inch	11.5 mm 0.453 inch
Ratings per*	IEC/EN 60664-1	IEC/EN 60664-1	IEC/EN 60664-1
Nominal voltage (III / 3)	320 V	630 V	1000 V
Rated impulse voltage (III / 3)	4 kV	6 kV	8 kV
Rated voltage (III / 2)	400 V	630 V	1000 V
Rated surge voltage (III / 2)	4 kV	6 kV	8 kV
Rated voltage (II / 2)	630 V	1000 V	1000 V
Rated surge voltage (II / 2)	4 kV	6 kV	8 kV
Rated current	32 A	32 A	32 A
Approvals per	UL 1059	UL 1059	UL 1059
Rated voltage UL (Use Group B)	300 V	300 V	600 V
Rated current UL (Use Group B)	20 A	20 A	20 A
Rated voltage UL (Use Group C)		300 V	600 V
Rated current UL (Use Group C)		20 A	20 A
Rated voltage UL (Use Group D)	300 V	600 V	
Rated current UL (Use Group D)	10 A	5 A	

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	9 ... 11 mm / 0.35 ... 0.43 inch
Conductor entry angle to the PCB	90°
Conductor cross-sections	
Solid conductor	0.2 ... 4 mm ² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 4 mm ² / 24 ... 12 AWG
Fine-stranded conductor with insulated ferrule	0.25 ... 2.5 mm ²
Fine-stranded conductor with uninsulated ferrule	0.25 ... 2.5 mm ²
Fine-stranded conductor, with twin ferrule	0.25 ... 1.5 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	0.8 x 1 mm
Drilled hole diameter	1.3 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2


Additional technical information,
see Volume 2, Section 13

Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block with Levers; 4 mm²

Pin Spacing: 5 mm; 7.5 mm; 11.5 mm

2604 Series

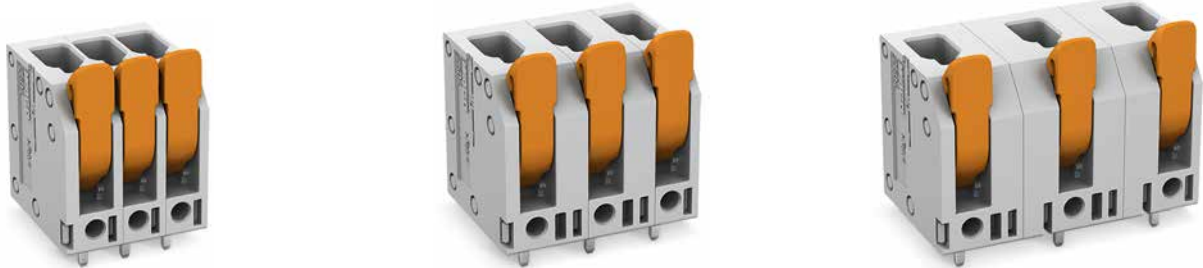


Dimensions (in mm):

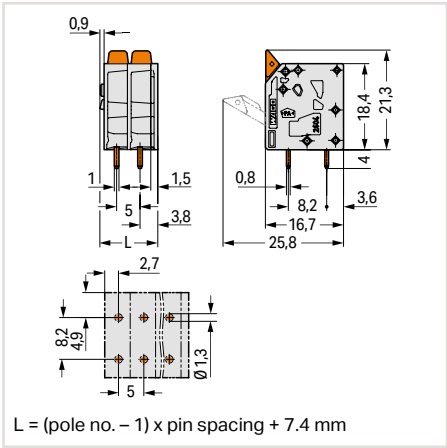

PCB terminal block with levers;
conductor entry perpendicular to PCB;
2 solder pins/pole; gray;
5 mm (0.197 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2604-3101	250
2	2604-3102	180
3	2604-3103	120
4	2604-3104	90
5	2604-3105	70
6	2604-3106	50
7	2604-3107	50
8	2604-3108	40
9	2604-3109	40
10	2604-3110	30
11	2604-3111	30
12	2604-3112	30


Dimensions (in mm):

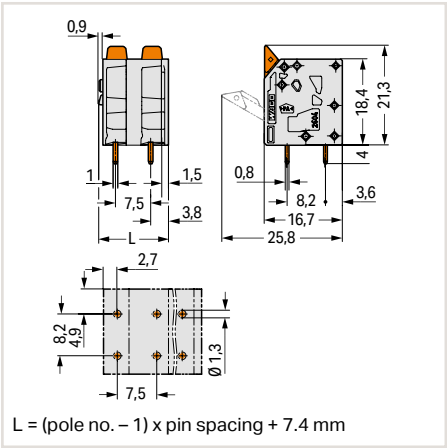

PCB terminal block with levers;
conductor entry perpendicular to PCB;
2 solder pins/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2604-3302	150
3	2604-3303	100
4	2604-3304	70
5	2604-3305	50
6	2604-3306	45
7	2604-3307	40
8	2604-3308	30
9	2604-3309	30
10	2604-3310	25
11	2604-3311	25
12	2604-3312	25

Dimensions (in mm):

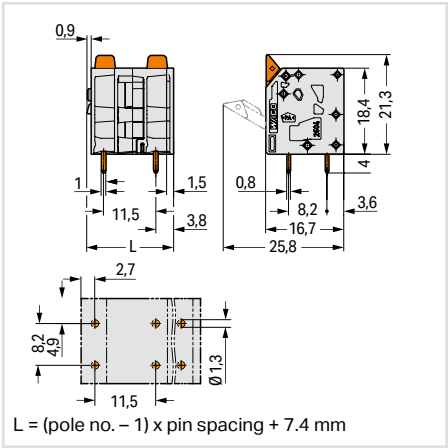

PCB terminal block with levers;
conductor entry perpendicular to PCB;
2 solder pins/pole; gray;
11.5 mm (0.453 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2604-3502	120
3	2604-3503	70
4	2604-3504	50
5	2604-3505	40
6	2604-3506	30
7	2604-3507	25
8	2604-3508	25
9	2604-3509	25
10	2604-3510	20
11	2604-3511	20
12	2604-3512	15

Available upon request (depending on quantity required):

- Other pole numbers
- Other colors
- Direct marking

PCB Terminal Block with Levers; 6 mm²


Pin Spacing: 7.5 mm

2606 Series

1



- PCB terminal block with lever-actuated Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously – convenient for terminating multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

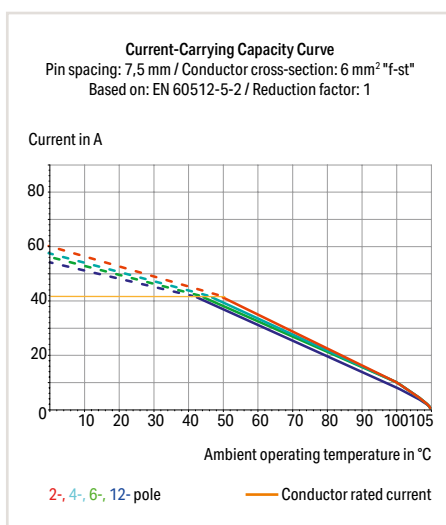

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	800 V
Rated impulse voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Rated voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	41 A
Approvals per	UL 1059
Rated voltage UL (Use Group B)	600 V
Rated current UL (Use Group B)	31 A
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	31 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	11 ... 13 mm / 0.43 ... 0.51 inch
Conductor entry angle to the PCB	0°
Conductor cross-sections	
Solid conductor	0.2 ... 10 mm ² / 24 ... 8 AWG
Fine-stranded conductor	0.2 ... 10 mm ² / 24 ... 8 AWG
Fine-stranded conductor with insulated ferrule	0.25 ... 6 mm ²
Fine-stranded conductor with uninsulated ferrule	0.25 ... 6 mm ²
Fine-stranded conductor, with twin ferrule	0.25 ... 2.5 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	1.5 x 1.2 mm
Drilled hole diameter	2 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

UL/CSA approval pending



Additional technical information,
see Volume 2, Section 13



Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block with Levers; 6 mm²

Pin Spacing: 7.5 mm

2606 Series




Dimensions (in mm):

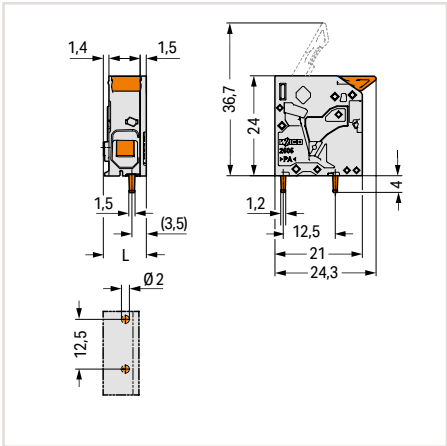

PCB terminal block with lever;
conductor entry parallel to PCB;
2 solder pins/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2606-1101	200

Dimensions (in mm):

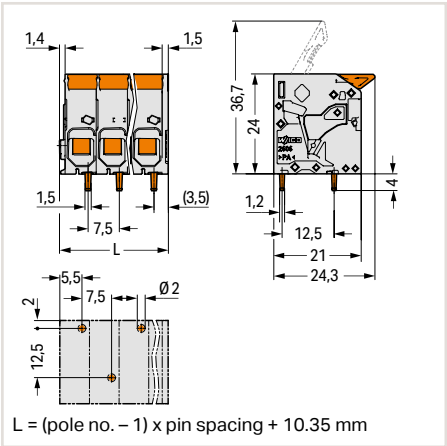

$L = (\text{pole no.} - 1) \times \text{pin spacing} + 10.35 \text{ mm}$

PCB terminal block with levers;
conductor entry parallel to PCB;
1 staggered solder pin/pole; gray;
7.5 mm (0.295 inch) pin spacing


Pole No.	Item No.	Pack. Unit
2	2606-1102/020-000	120
3	2606-1103/020-000	80
4	2606-1104/020-000	60
5	2606-1105/020-000	50
6	2606-1106/020-000	40
7	2606-1107/020-000	35
8	2606-1108/020-000	30
9	2606-1109/020-000	25
10	2606-1110/020-000	25
11	2606-1111/020-000	25
12	2606-1112/020-000	25

- Available upon request (depending on quantity required):
- Other pole numbers
 - Other colors
 - Other pin spacing
 - Direct marking


PCB Terminal Block with Levers; 6 mm²

Pin Spacing: 7.5 mm

2606 Series

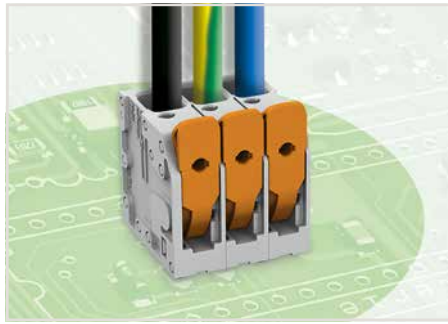

- PCB terminal block with lever-actuated Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously – convenient for terminating multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

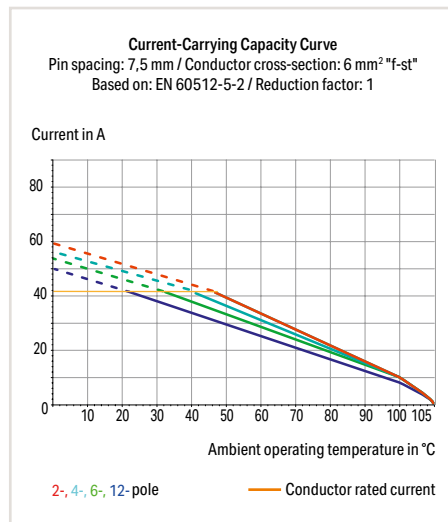

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	800 V
Rated impulse voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Rated voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	41 A
Approvals per	UL 1059
Rated voltage UL (Use Group B)	600 V
Rated current UL (Use Group B)	31 A
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	31 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	11 ... 13 mm / 0.43 ... 0.51 inch
Conductor entry angle to the PCB	90°
Conductor cross-sections	
Solid conductor	0.2 ... 10 mm ² / 24 ... 8 AWG
Fine-stranded conductor	0.2 ... 10 mm ² / 24 ... 8 AWG
Fine-stranded conductor with insulated ferrule	0.25 ... 6 mm ²
Fine-stranded conductor with uninsulated ferrule	0.25 ... 6 mm ²
Fine-stranded conductor, with twin ferrule	0.25 ... 2.5 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	1.5 x 1.2 mm
Drilled hole diameter	2 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

UL/CSA approval pending

 Additional technical information,
see Volume 2, Section 13

 Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block with Levers; 6 mm²

Pin Spacing: 7.5 mm

2606 Series




Dimensions (in mm):

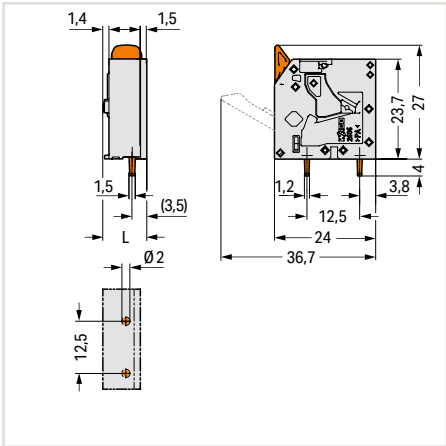

PCB terminal block with lever;
conductor entry perpendicular to PCB;
2 solder pins/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2606-3101	200

Dimensions (in mm):

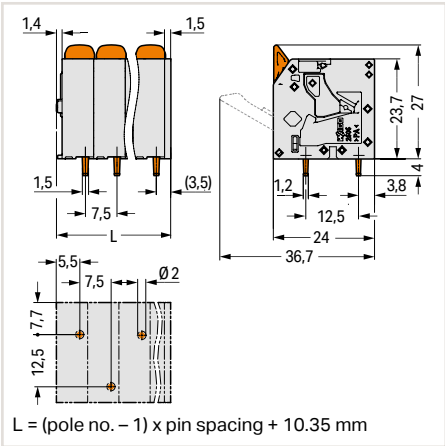

PCB terminal block with levers;
conductor entry perpendicular to PCB;
1 staggered solder pin/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2606-3102/020-000	120
3	2606-3103/020-000	80
4	2606-3104/020-000	60
5	2606-3105/020-000	50
6	2606-3106/020-000	40
7	2606-3107/020-000	35
8	2606-3108/000-000	30
9	2606-3109/020-000	25
10	2606-3110/020-000	25
11	2606-3111/020-000	25
12	2606-3112/020-000	25



Insert solid conductors via push-in termination.
Insert fine-stranded conductors – as well as remove
all conductors – via operating lever.

Available upon request (depending on quantity required):

- Other pole numbers
- Other colors
- Other pin spacing
- Direct marking

PCB Terminal Block with Levers; 16 mm²


Pin Spacing: 10 mm

2616 Series

1



- PCB terminal block with lever-actuated Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously – convenient for terminating multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

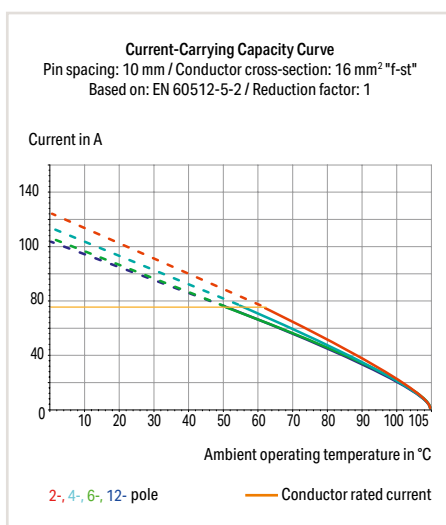

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	1000 V
Rated impulse voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Rated voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	76 A
Approvals per	UL 1059
Rated voltage UL (Use Group B)	600 V
Rated current UL (Use Group B)	66 A
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	66 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	18 ... 20 mm / 0.71 ... 0.79 inch
Conductor entry angle to the PCB	0°
Conductor cross-sections	
Solid conductor	0.75 ... 16 mm ² / 18 ... 4 AWG
Fine-stranded conductor	0.75 ... 25 mm ² / 18 ... 4 AWG
Fine-stranded conductor with insulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor with uninsulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor, with twin ferrule	0.75 ... 6 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	1.2 x 1.2 mm
Drilled hole diameter	1.7 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

UL/CSA approval pending

Additional technical information,
see Volume 2, Section 13

Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block with Levers; 16 mm²

Pin Spacing: 10 mm

2616 Series




Dimensions (in mm):

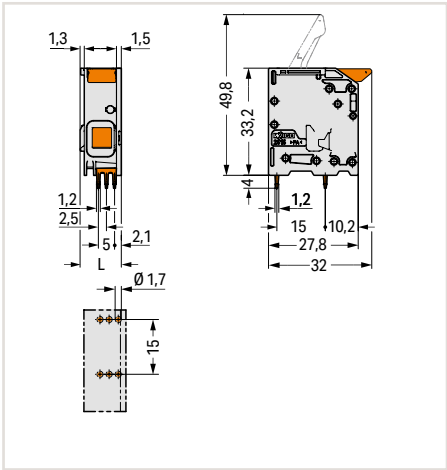

PCB terminal block with lever;
conductor entry parallel to PCB;
6 solder pins/pole; gray;
10 mm (0.394 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2616-1101	100

Dimensions (in mm):

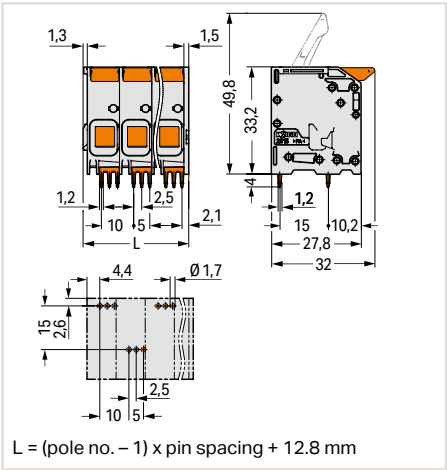

PCB terminal block with levers;
conductor entry parallel to PCB;
3 staggered solder pins/pole; gray;
10 mm (0.394 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2616-1102/020-000	50
3	2616-1103/020-000	40
4	2616-1104/020-000	25
5	2616-1105/020-000	25
6	2616-1106/020-000	20
7	2616-1107/020-000	20
8	2616-1108/020-000	15
9	2616-1109/020-000	15
10	2616-1110/020-000	15
11	2616-1111/020-000	10
12	2616-1112/020-000	10

Available upon request (depending on quantity required):

- Other pole numbers
- Other colors
- Other pin spacing
- Direct marking

PCB Terminal Block with Levers; 16 mm²


Pin Spacing: 10 mm

2616 Series

1



- PCB terminal block with lever-actuated Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously – convenient for terminating multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

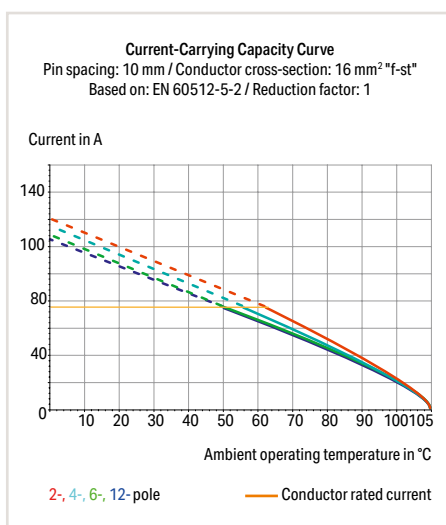

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	1000 V
Rated impulse voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Rated voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	76 A
Approvals per	UL 1059
Rated voltage UL (Use Group B)	600 V
Rated current UL (Use Group B)	66 A
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	66 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	18 ... 20 mm / 0.71 ... 0.79 inch
Conductor entry angle to the PCB	90°
Conductor cross-sections	
Solid conductor	0.75 ... 16 mm ² / 18 ... 4 AWG
Fine-stranded conductor	0.75 ... 25 mm ² / 18 ... 4 AWG
Fine-stranded conductor with insulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor with uninsulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor, with twin ferrule	0.75 ... 6 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	1.2 x 1.2 mm
Drilled hole diameter	1.7 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

UL/CSA approval pending



Additional technical information,
see Volume 2, Section 13



Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block with Levers; 16 mm²

Pin Spacing: 10 mm

2616 Series




Dimensions (in mm):

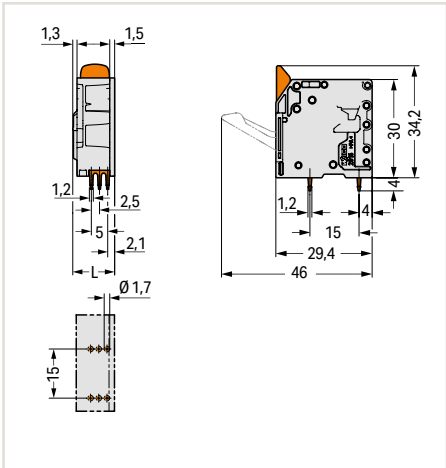

PCB terminal block with lever;
conductor entry perpendicular to PCB;
6 solder pins/pole; gray;
10 mm (0.394 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2616-3101	100

Dimensions (in mm):

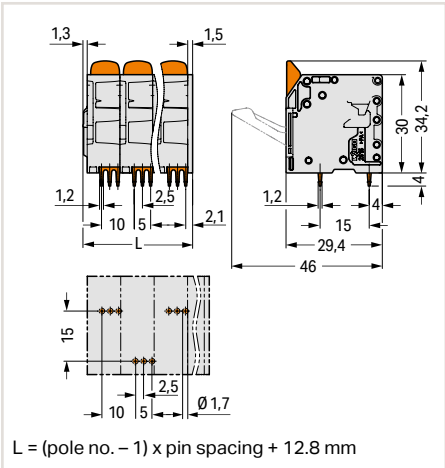

PCB terminal block with levers;
conductor entry perpendicular to PCB;
3 staggered solder pins/pole; gray;
10 mm (0.394 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2616-3102/020-000	50
3	2616-3103/020-000	40
4	2616-3104/020-000	25
5	2616-3105/020-000	25
6	2616-3106/020-000	20
7	2616-3107/020-000	20
8	2616-3108/020-000	15
9	2616-3109/020-000	15
10	2616-3110/020-000	15
11	2616-3111/020-000	10
12	2616-3112/020-000	10



Insert solid conductors via push-in termination.
Insert fine-stranded conductors – as well as remove
all conductors – via operating lever.

Available upon request (depending on quantity required):

- Other pole numbers
- Other colors
- Other pin spacing
- Direct marking


PCB Terminal Block; 4 mm² Pin Spacing: 5 mm; 7.5 mm; 11.5 mm 2624 Series



- PCB terminal block with Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Ideal for panel feedthrough applications via operation parallel to conductor entry
- Testing can be performed both parallel and perpendicular to conductor entry

Current-Carrying Capacity Curve

Pin spacing: 5 mm / Conductor cross-section: 4 mm² "f-st"
Based on: EN 60512-5-2 / Reduction factor: 1

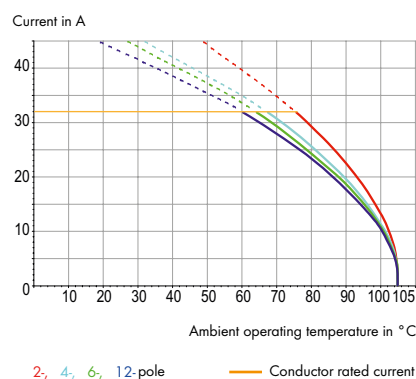

Electrical Data for Pin Spacing

	5 mm 0.197 inch	7.5 mm 0.295 inch	11.5 mm 0.453 inch
Ratings per*	IEC/EN 60664-1	IEC/EN 60664-1	IEC/EN 60664-1
Nominal voltage (III / 3)	320 V	630 V	1000 V
Rated impulse voltage (III / 3)	4 kV	6 kV	8 kV
Rated voltage (III / 2)	400 V	630 V	1000 V
Rated surge voltage (III / 2)	4 kV	6 kV	8 kV
Rated voltage (II / 2)	630 V	1000 V	1000 V
Rated surge voltage (II / 2)	4 kV	6 kV	8 kV
Rated current	32 A	32 A	32 A
Approvals per	UL 1059	UL 1059	UL 1059
Rated voltage UL (Use Group B)	300 V	300 V	600 V
Rated current UL (Use Group B)	26 A	26 A	26 A
Rated voltage UL (Use Group C)		150 V	600 V
Rated current UL (Use Group C)		26 A	26 A
Rated voltage UL (Use Group D)	300 V	300 V	
Rated current UL (Use Group D)	10 A	10 A	

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	10 ... 12 mm / 0.39 ... 0.47 inch
Conductor entry angle to the PCB	0°
Conductor cross-sections	
Solid conductor	0.2 ... 6 mm ² / 24 ... 10 AWG
Fine-stranded conductor	0.2 ... 6 mm ² / 24 ... 10 AWG
Fine-stranded conductor with insulated ferrule	0.25 ... 2.5 mm ²
Fine-stranded conductor with uninsulated ferrule	0.25 ... 2.5 mm ²
Fine-stranded conductor, with twin ferrule	0.25 ... 1.5 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	0.8 x 1 mm
Drilled hole diameter	1.3 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

Additional technical information,
see Volume 2, Section 13

Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block; 4 mm²

Pin Spacing: 5 mm; 7.5 mm; 11.5 mm

2624 Series




Dimensions (in mm):

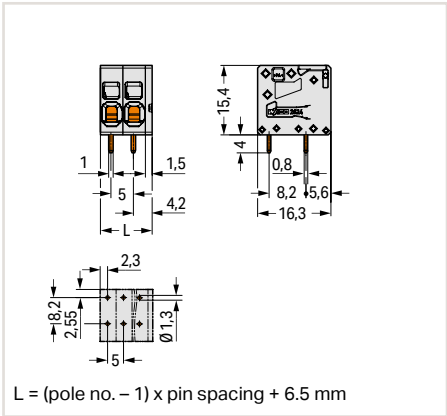

PCB terminal block; conductor entry parallel to PCB; 2 solder pins/pole; gray; 5 mm (0.197 inch) pin spacing		
Pole No.	Item No.	Pack. Unit
1	2624-1101	300
2	2624-1102	200
3	2624-1103	150
4	2624-1104	100
5	2624-1105	100
6	2624-1106	80
7	2624-1107	50
8	2624-1108	50
9	2624-1109	50
10	2624-1110	40
11	2624-1111	35
12	2624-1112	35




Dimensions (in mm):

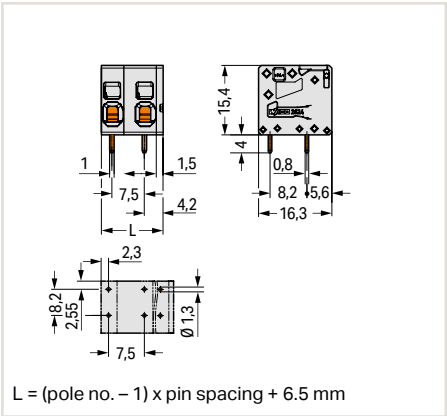

PCB terminal block; conductor entry parallel to PCB; 2 solder pins/pole; gray; 7.5 mm (0.295 inch) pin spacing		
Pole No.	Item No.	Pack. Unit
2	2624-1302	200
3	2624-1303	120
4	2624-1304	80
5	2624-1305	70
6	2624-1306	50
7	2624-1307	50
8	2624-1308	40
9	2624-1309	35
10	2624-1310	35
11	2624-1311	25
12	2624-1312	25



Dimensions (in mm):

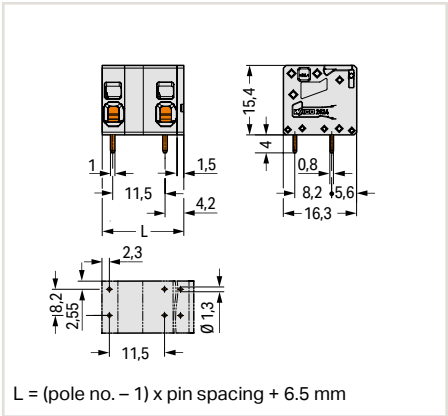

PCB terminal block; conductor entry parallel to PCB; 2 solder pins/pole; gray; 11.5 mm (0.453 inch) pin spacing		
Pole No.	Item No.	Pack. Unit
2	2624-1502	100
3	2624-1503	80
4	2624-1504	50
5	2624-1505	40
6	2624-1506	40
7	2624-1507	30
8	2624-1508	25
9	2624-1509	25
10	2624-1510	20
11	2624-1511	20
12	2624-1512	20

Available upon request (depending on quantity required):

- Other pole numbers
- Other colors
- Direct marking


PCB Terminal Block; 4 mm² Pin Spacing: 5 mm; 7.5 mm; 11.5 mm 2624 Series



- PCB terminal block with Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Ideal for panel feedthrough applications via operation parallel to conductor entry
- Testing can be performed both parallel and perpendicular to conductor entry

Current-Carrying Capacity Curve

Pin spacing: 5 mm / Conductor cross-section: 4 mm² "f-st"
Based on: EN 60512-5-2 / Reduction factor: 1

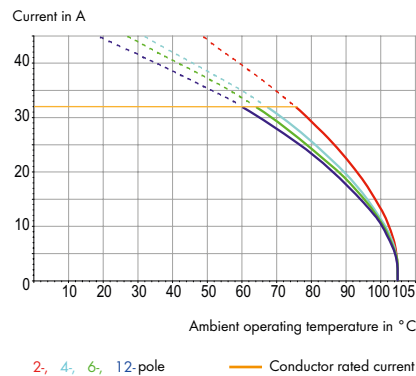

Electrical Data for Pin Spacing

	5 mm 0.197 inch	7.5 mm 0.295 inch	11.5 mm 0.453 inch
Ratings per*	IEC/EN 60664-1	IEC/EN 60664-1	IEC/EN 60664-1
Nominal voltage (III / 3)	320 V	630 V	1000 V
Rated impulse voltage (III / 3)	4 kV	6 kV	8 kV
Rated voltage (III / 2)	400 V	630 V	1000 V
Rated surge voltage (III / 2)	4 kV	6 kV	8 kV
Rated voltage (II / 2)	630 V	1000 V	1000 V
Rated surge voltage (II / 2)	4 kV	6 kV	8 kV
Rated current	32 A	32 A	32 A
Approvals per	UL 1059	UL 1059	UL 1059
Rated voltage UL (Use Group B)	300 V	300 V	600 V
Rated current UL (Use Group B)	26 A	26 A	26 A
Rated voltage UL (Use Group C)		150 V	600 V
Rated current UL (Use Group C)		26 A	26 A
Rated voltage UL (Use Group D)	300 V	300 V	
Rated current UL (Use Group D)	10 A	10 A	

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	10 ... 12 mm / 0.39 ... 0.47 inch
Conductor entry angle to the PCB	90°
Conductor cross-sections	
Solid conductor	0.2 ... 6 mm ² / 24 ... 10 AWG
Fine-stranded conductor	0.2 ... 6 mm ² / 24 ... 10 AWG
Fine-stranded conductor with insulated ferrule	0.25 ... 2.5 mm ²
Fine-stranded conductor with uninsulated ferrule	0.25 ... 2.5 mm ²
Fine-stranded conductor, with twin ferrule	0.25 ... 1.5 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	0.8 x 1 mm
Drilled hole diameter	1.3 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

Additional technical information,
see Volume 2, Section 13

Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block; 4 mm²

Pin Spacing: 5 mm; 7.5 mm; 11.5 mm

2624 Series



Dimensions (in mm):

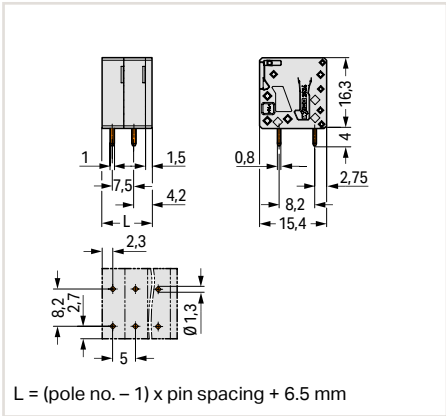


PCB terminal block;
conductor entry perpendicular to PCB;
2 solder pins/pole; gray;
5 mm (0.197 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2624-3101	300
2	2624-3102	200
3	2624-3103	150
4	2624-3104	100
5	2624-3105	100
6	2624-3106	80
7	2624-3107	50
8	2624-3108	50
9	2624-3109	50
10	2624-3110	40
11	2624-3111	35
12	2624-3112	35



Dimensions (in mm):

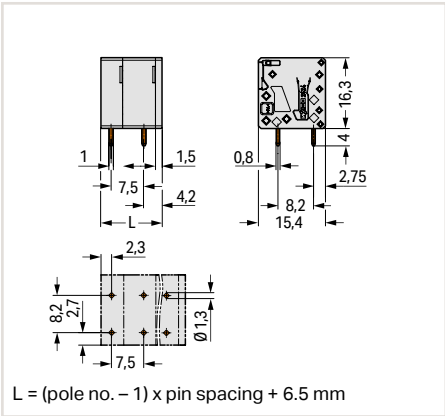


PCB terminal block;
conductor entry perpendicular to PCB;
2 solder pins/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2624-3302	200
3	2624-3303	120
4	2624-3304	80
5	2624-3305	70
6	2624-3306	50
7	2624-3307	50
8	2624-3308	40
9	2624-3309	35
10	2624-3310	35
11	2624-3311	25
12	2624-3312	25



Dimensions (in mm):

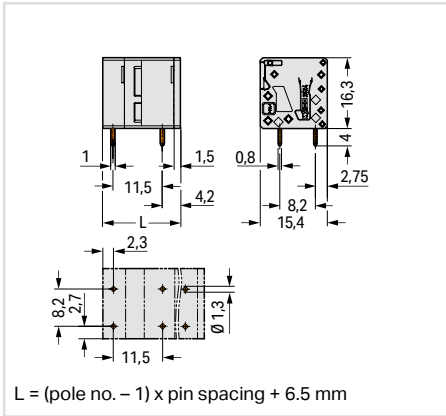

PCB terminal block;
conductor entry perpendicular to PCB;
2 solder pins/pole; gray;
11.5 mm (0.453 inch) pin spacing


Pole No.	Item No.	Pack. Unit
2	2624-3502	100
3	2624-3503	80
4	2624-3504	50
5	2624-3505	40
6	2624-3506	40
7	2624-3507	30
8	2624-3508	25
9	2624-3509	25
10	2624-3510	20
11	2624-3511	20
12	2624-3512	20

Available upon request (depending on quantity required):


- Other pole numbers
- Other colors
- Direct marking

PCB Terminal Block; 6 mm² Pin Spacing: 7.5 mm 2626 Series

1

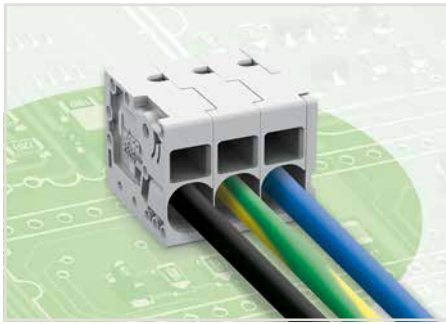

- PCB terminal block with Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Ideal for panel feedthrough applications via operation parallel to conductor entry
- Testing can be performed both parallel and perpendicular to conductor entry
- Spacers can be used to increase the pin spacing.

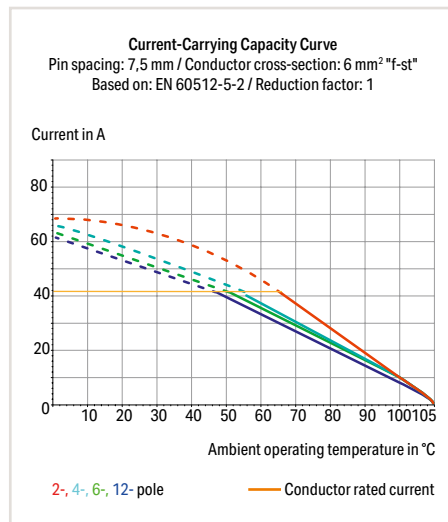

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	800 V
Rated impulse voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Rated voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	41 A
Approvals per	UL 1059
Rated voltage UL (Use Group B)	600 V
Rated current UL (Use Group B)	35 A
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	35 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	13 ... 15 mm / 0.51 ... 0.59 inch
Conductor entry angle to the PCB	0°
Conductor cross-sections	
Solid conductor	0.2 ... 10 mm ² / 24 ... 8 AWG
Fine-stranded conductor	0.2 ... 10 mm ² / 24 ... 8 AWG
Fine-stranded conductor with insulated ferrule	0.5 ... 6 mm ²
Fine-stranded conductor with uninsulated ferrule	0.25 ... 6 mm ²
Fine-stranded conductor, with twin ferrule	0.25 ... 2.5 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	1.5 x 1 mm
Drilled hole diameter	2 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

UL/CSA approval pending

Additional technical information,
see Volume 2, Section 13

Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block; 6 mm²

Pin Spacing: 7.5 mm

2626 Series




Dimensions (in mm):

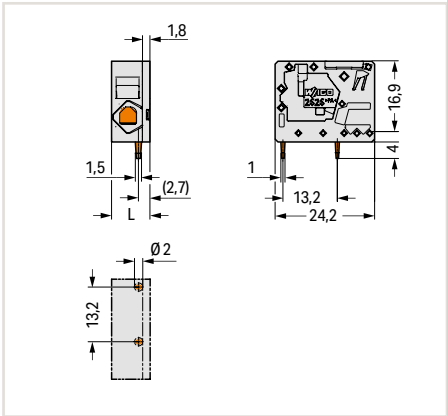

PCB terminal block;
conductor entry parallel to PCB;
2 solder pins/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2626-1101	200

Dimensions (in mm):

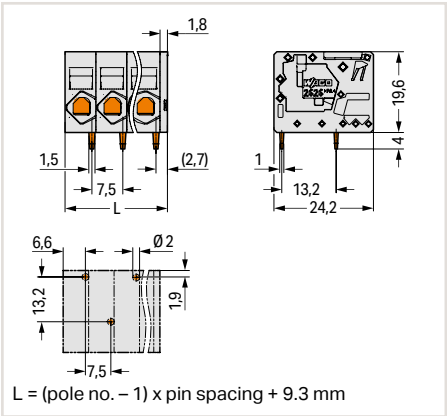

PCB terminal block;
conductor entry parallel to PCB;
1 staggered solder pin/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2626-1102/020-000	140
3	2626-1103/020-000	90
4	2626-1104/020-000	70
5	2626-1105/020-000	60
6	2626-1106/020-000	50
7	2626-1107/020-000	40
8	2626-1108/020-000	40
9	2626-1109/020-000	35
10	2626-1110/020-000	30
11	2626-1111/020-000	25
12	2626-1112/020-000	25


- Available upon request (depending on quantity required):
- Other pole numbers
 - Other colors
 - Other pin spacing
 - Direct marking

PCB Terminal Block; 6 mm² Pin Spacing: 7.5 mm 2626 Series

1



- PCB terminal block with Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Ideal for panel feedthrough applications via operation parallel to conductor entry
- Testing can be performed both parallel and perpendicular to conductor entry
- Spacers can be used to increase the pin spacing.

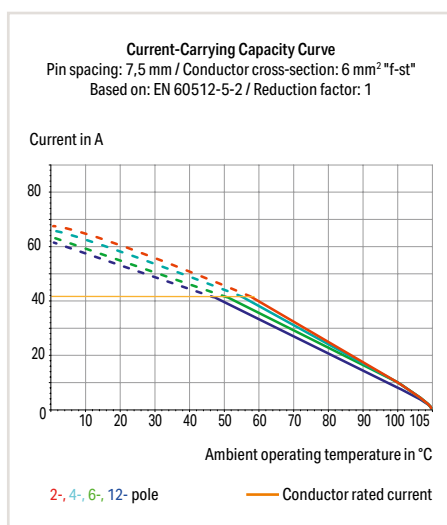

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	800 V
Rated impulse voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Rated voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	41 A
Approvals per	UL 1059
Rated voltage UL (Use Group B)	600 V
Rated current UL (Use Group B)	35 A
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	35 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	13 ... 15 mm / 0.51 ... 0.59 inch
Conductor entry angle to the PCB	90°
Conductor cross-sections	
Solid conductor	0.2 ... 10 mm ² / 24 ... 8 AWG
Fine-stranded conductor	0.2 ... 10 mm ² / 24 ... 8 AWG
Fine-stranded conductor with insulated ferrule	0.5 ... 6 mm ²
Fine-stranded conductor with uninsulated ferrule	0.25 ... 6 mm ²
Fine-stranded conductor, with twin ferrule	0.25 ... 2.5 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	1.5 x 1 mm
Drilled hole diameter	2 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

UL/CSA approval pending

Additional technical information,
see Volume 2, Section 13

Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block; 6 mm²

Pin Spacing: 7.5 mm

2626 Series




Dimensions (in mm):

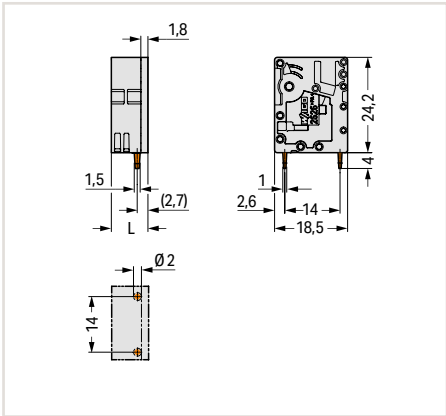

PCB terminal block;
conductor entry perpendicular to PCB;
2 solder pins/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2626-3101	200

Dimensions (in mm):

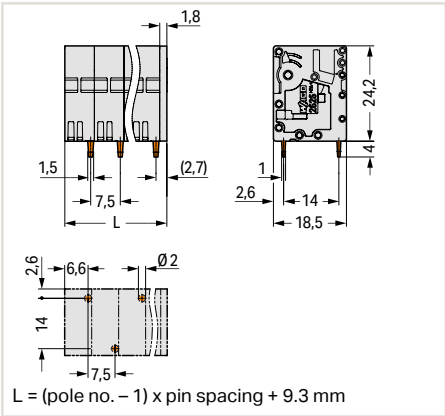

PCB terminal block;
conductor entry perpendicular to PCB;
1 staggered solder pin/pole; gray;
7.5 mm (0.295 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2626-3102/020-000	140
3	2626-3103/020-000	90
4	2626-3104/020-000	70
5	2626-3105/020-000	60
6	2626-3106/020-000	50
7	2626-3107/020-000	40
8	2626-3108/020-000	40
9	2626-3109/020-000	35
10	2626-3110/020-000	30
11	2626-3111/020-000	25
12	2626-3112/020-000	25



Insert solid conductors via push-in termination.
Insert fine-stranded conductors – as well as remove
all conductors – via operating tool.

Available upon request (depending on quantity required):


- Other pole numbers
- Other colors
- Other pin spacing
- Direct marking

PCB Terminal Block; 16 mm² Pin Spacing: 10 mm 2636 Series

1



- PCB terminal block with Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Ideal for panel feedthrough applications via operation parallel to conductor entry
- Testing can be performed both parallel and perpendicular to conductor entry
- Spacers can be used to increase the pin spacing.

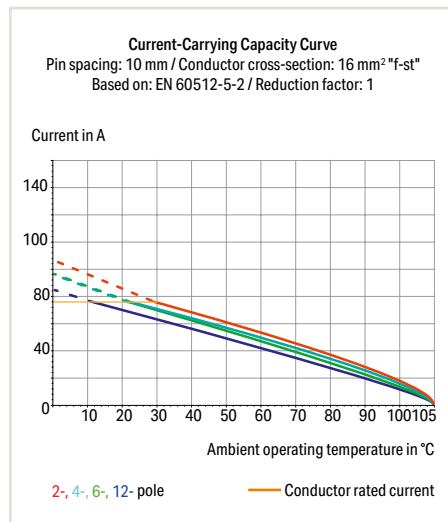

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	1000 V
Rated impulse voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Rated voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	76 A
Approvals per	UL 1059
Rated voltage UL (Use Group B)	600 V
Rated current UL (Use Group B)	66 A
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	66 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	18 ... 20 mm / 0.71 ... 0.79 inch
Conductor entry angle to the PCB	0°
Conductor cross-sections	
Solid conductor	0.75 ... 16 mm ² / 18 ... 4 AWG
Fine-stranded conductor	0.75 ... 25 mm ² / 18 ... 4 AWG
Fine-stranded conductor with insulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor with uninsulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor, with twin ferrule	0.75 ... 6 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	1 x 1.2 mm
Drilled hole diameter	1.7 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

UL/CSA approval pending

Additional technical information,
see Volume 2, Section 13

Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block; 16 mm²

Pin Spacing: 10 mm

2636 Series




Dimensions (in mm):

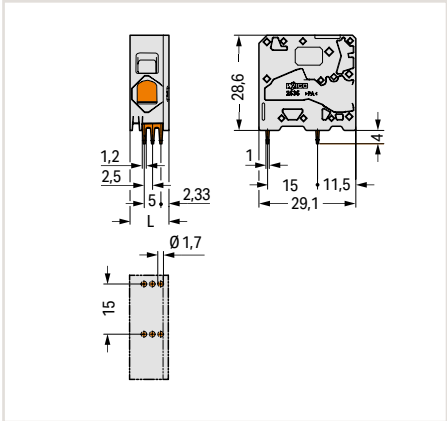

PCB terminal block;
conductor entry parallel to PCB;
6 solder pins/pole; gray;
10 mm (0.394 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2636-1101	100

Dimensions (in mm):

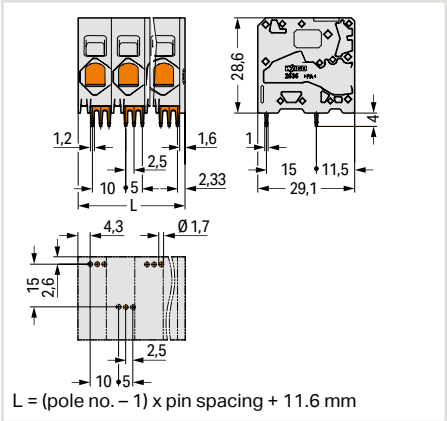

PCB terminal block;
conductor entry parallel to PCB;
3 solder pins/pole; gray;
10 mm (0.394 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2636-1102/020-000	50
3	2636-1103/020-000	50
4	2636-1104/020-000	25
5	2636-1105/020-000	25
6	2636-1106/020-000	25
7	2636-1107/020-000	20
8	2636-1108/020-000	20
9	2636-1109/020-000	20
10	2636-1110/020-000	15
11	2636-1111/020-000	15
12	2636-1112/020-000	15

Available upon request (depending on quantity required):


- Other pole numbers
- Other colors
- Other pin spacing
- Direct marking

PCB Terminal Block; 16 mm² Pin Spacing: 10 mm 2636 Series

1



- PCB terminal block with Push-in CAGE CLAMP® connection
- Push-in termination of solid and ferruled conductors
- Ideal for panel feedthrough applications via operation parallel to conductor entry
- Testing can be performed both parallel and perpendicular to conductor entry

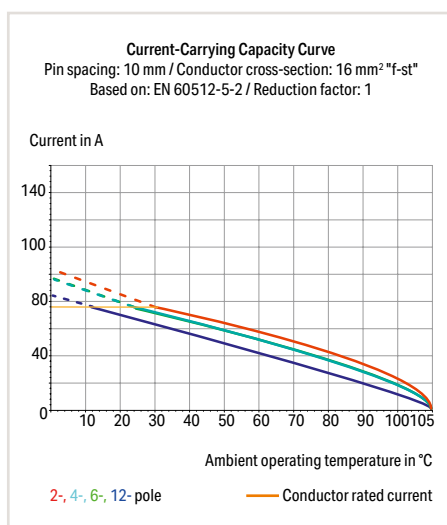

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	1000 V
Rated impulse voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Rated voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	76 A
Approvals per	UL 1059
Rated voltage UL (Use Group B)	600 V
Rated current UL (Use Group B)	66 A
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	66 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	18 ... 20 mm / 0.71 ... 0.79 inch
Conductor entry angle to the PCB	90°
Conductor cross-sections	
Solid conductor	0.75 ... 16 mm ² / 18 ... 4 AWG
Fine-stranded conductor	0.75 ... 25 mm ² / 18 ... 4 AWG
Fine-stranded conductor with insulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor with uninsulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor, with twin ferrule	0.75 ... 6 mm ²

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	1 x 1.2 mm
Drilled hole diameter	1.7 ^{+0.1} mm

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin-plated

*(III / 2) ≙ Overvoltage category III /
Pollution degree 2

UL/CSA approval pending

Additional technical information,
see Volume 2, Section 13

Approvals and corresponding ratings,
visit www.wago.com


PCB Terminal Block; 16 mm²

Pin Spacing: 10 mm

2636 Series




Dimensions (in mm):

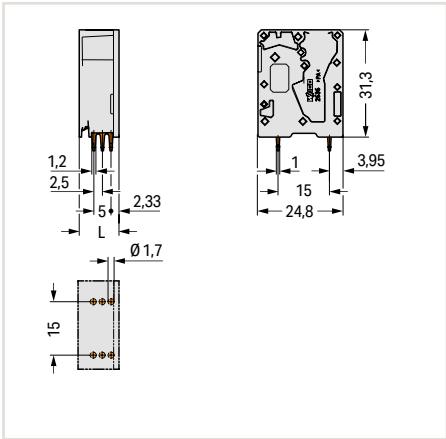

PCB terminal block;
conductor entry perpendicular to PCB;
6 solder pins/pole; gray;
10 mm (0.394 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2636-3101	100

Dimensions (in mm):

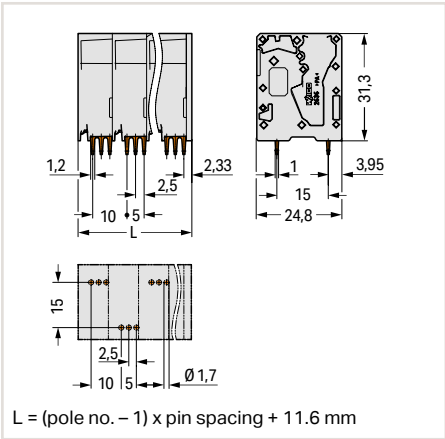

PCB terminal block;
conductor entry perpendicular to PCB;
3 staggered solder pins/pole; gray;
10 mm (0.394 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	2636-3102/020-000	50
3	2636-3103/020-000	50
4	2636-3104/020-000	25
5	2636-3105/020-000	25
6	2636-3106/020-000	25
7	2636-3107/020-000	20
8	2636-3108/020-000	20
9	2636-3109/020-000	20
10	2636-3110/020-000	15
11	2636-3111/020-000	15
12	2636-3112/020-000	15




Insert solid conductors via push-in termination.
Insert fine-stranded conductors – as well as remove
all conductors – via operating tool.

- Available upon request (depending on quantity required):
- Other pole numbers
 - Other colors
 - Other pin spacing
 - Direct marking

Through-Board SMD PCB Terminal Block; 0.75 mm²

Pin Spacing: 6.5 mm

2070 Series

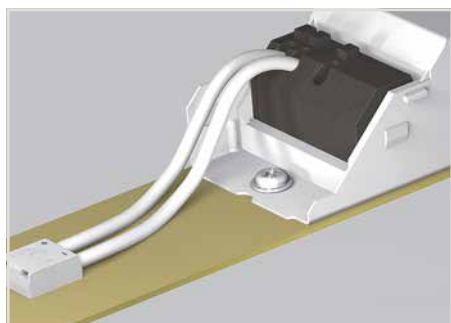

- SMD PCB terminal block with Push-in CAGE CLAMP® connection for back-side wiring of LED modules
- Low profile of just 1.1 mm on the module's front side
- Connect solid conductors via push-in termination
- Insert fine-stranded conductors and remove all conductors via operating tool

Electrical Data for FR4 PCB Type

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	320 V
Rated surge voltage (III / 3)	4 kV
Rated voltage (III / 2)	320 V
Rated surge voltage (III / 2)	4 kV
Nominal voltage (II / 2)	630 V
Rated surge voltage (II / 2)	4 kV
Rated current	9 A

Electrical Data for Metal-Core PCBs

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	200 V
Rated surge voltage (III / 3)	4 kV
Rated voltage (III / 2)	320 V
Rated surge voltage (III / 2)	4 kV
Nominal voltage (II / 2)	500 V
Rated surge voltage (II / 2)	4 kV
Rated current	9 A

Approvals per	UL 1977
Rated voltage UL	600 V
Rated current UL	9 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	8.5 ... 10 mm / 0.345 ... 0.395 inch
Conductor entry angle to the PCB	0°
Conductor range	
Solid conductor	0.2 ... 0.75 mm ² / 24 ... 18 AWG
Fine-stranded conductor	0.2 ... 0.75 mm ² / 24 ... 18 AWG

Material Data

Material group	I
Insulation material	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Contact material	Copper alloy
Contact plating	Tin-plated

Clearance and creepage distances ≥ 3.0 mm:
500 V in applications per EN 60598-1

*(III / 2) $\triangleq$ Overvoltage category III /
Pollution degree 2

 Operating tool
see page 57



 Additional technical information,
see Volume 2, Section 13

 Approvals and corresponding ratings,
visit www.wago.com


Through-Board SMD PCB Terminal Block without Cover; 0.75 mm²

Pin Spacing: 6.5 mm


2070 Series

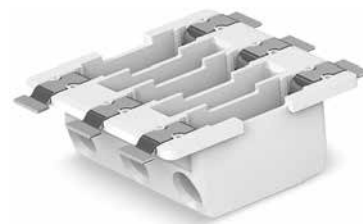





Dimensions (in mm):

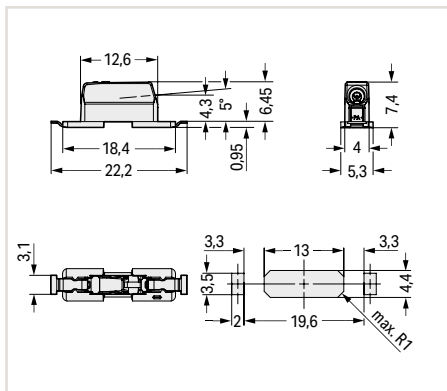

Dimensions (in mm):

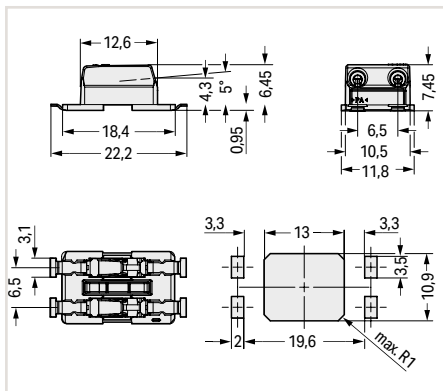

Dimensions (in mm):

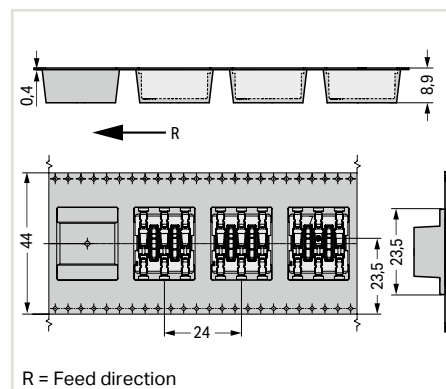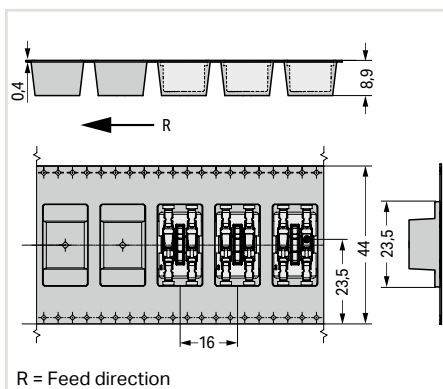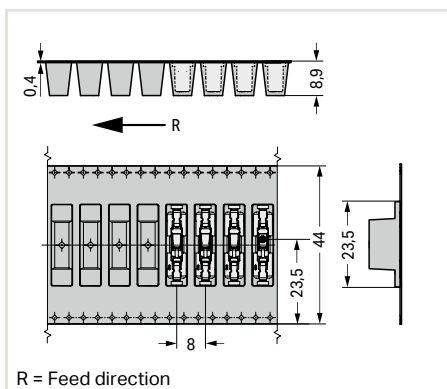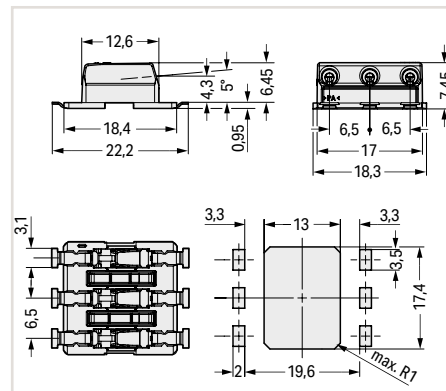

Through-board SMD PCB terminal block without cover; in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
1	2070-451/998-406	4770 (954)

Through-board SMD PCB terminal block without cover; in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
2	2070-452/998-406	2385 (477)

Through-board SMD PCB terminal block without cover; in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
3	2070-453/998-406	1590 (318)

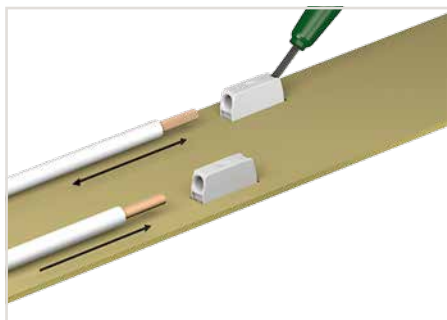

Insert fine-stranded conductors – and remove conductors – via operating tool. Solid conductors can also be terminated by simply pushing them in.

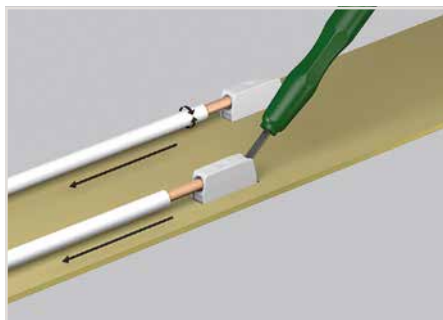


Use an operating tool or simply "twist and pull" to remove solid conductors.

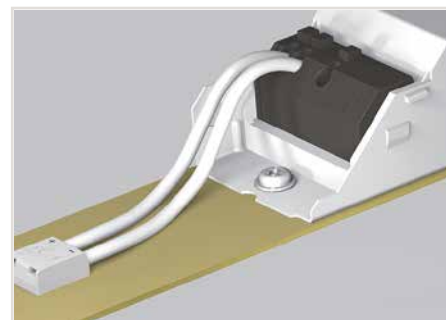


Shift wiring to the back of the LED module via 2070 Series SMD PCB Terminal Blocks.


Through-Board SMD PCB Terminal Block with Cover; 0.75 mm² Pin Spacing: 6.5 mm 2070 Series

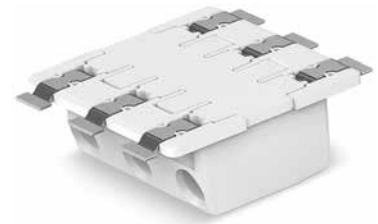





Dimensions (in mm):

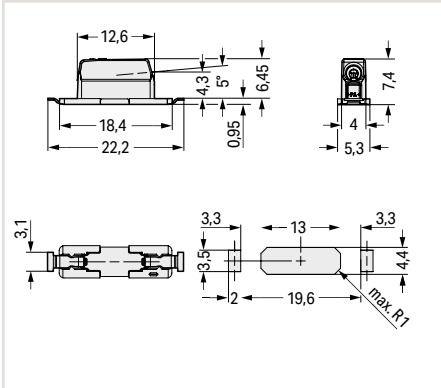

Dimensions (in mm):

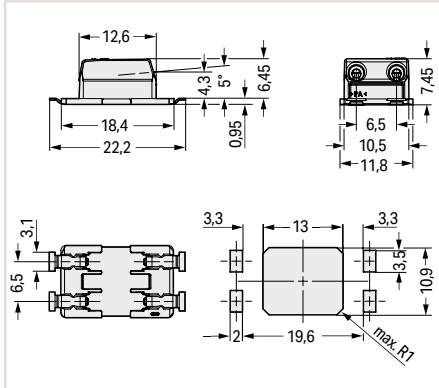

Dimensions (in mm):

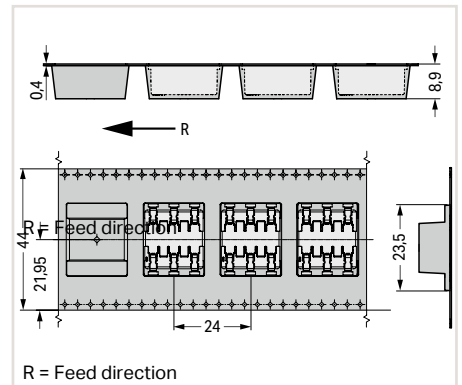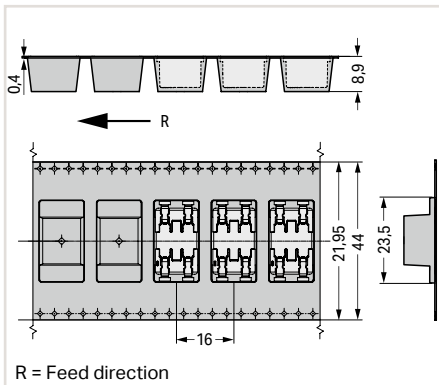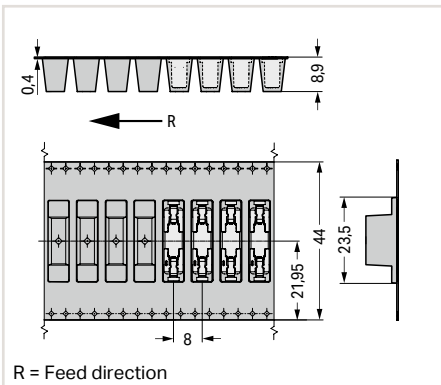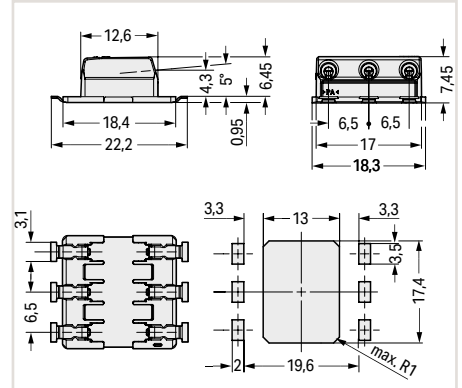

Through-board SMD PCB terminal block with cover; in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
1	2070-461/998-406	4770 (954)

Through-board SMD PCB terminal block with cover; in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
2	2070-462/998-406	2385 (477)

Through-board SMD PCB terminal block with cover; in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
3	2070-463/998-406	1590 (318)

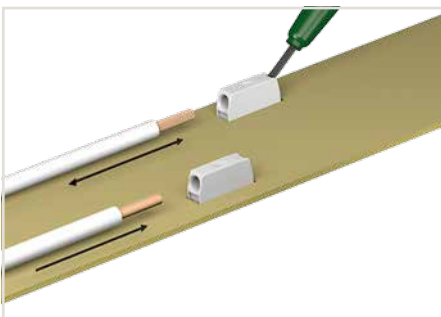

Insert fine-stranded conductors – and remove conductors – via operating tool. Solid conductors can also be terminated by simply pushing them in.

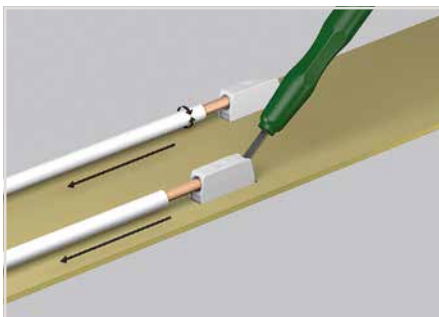

Use an operating tool or simply "twist and pull" to remove solid conductors.

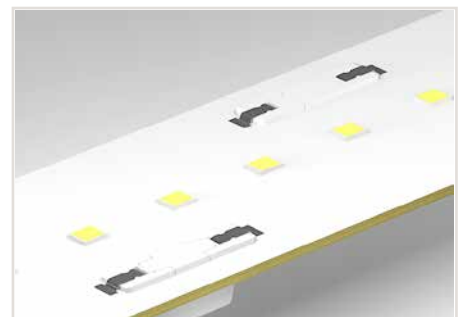

The variants with cover feature a center contact surface for easy pick-and-place assembly and minimum shadowing.

Through-Board SMD PCB Terminal Block with Cover and Marking; 0.75 mm²


Pin Spacing: 6.5 mm

2070 Series


2







Dimensions (in mm):

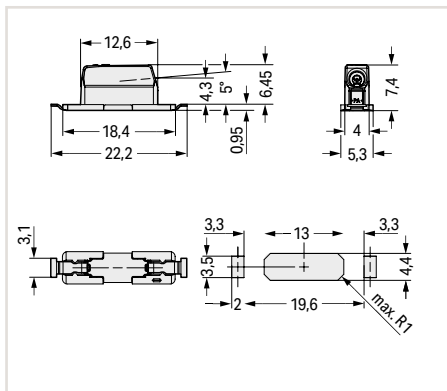

Dimensions (in mm):

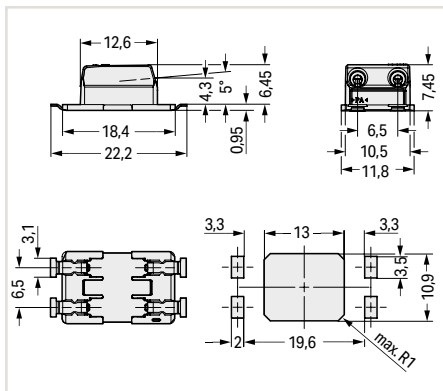

Dimensions (in mm):

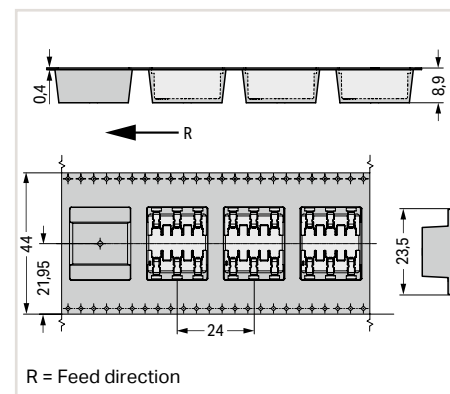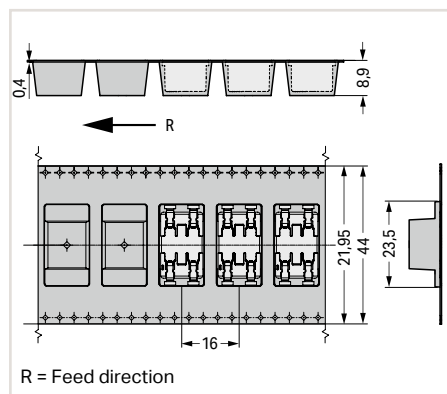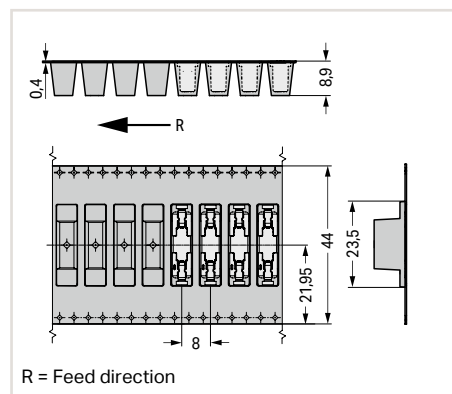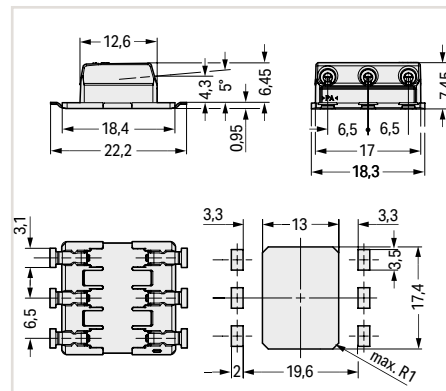

Through-board SMD PCB terminal block with cover and marking (+); in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
1	2070-521/998-406	4770 (954)

Through-board SMD PCB terminal block with cover and marking (+ -); in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
2	2070-522/998-406	2385 (477)

Through-board SMD PCB terminal block with cover and marking (+ - plain); in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
3	2070-523/998-406	1590 (318)

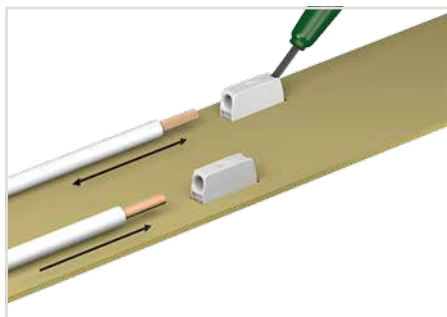

Insert fine-stranded conductors – and remove conductors – via operating tool. Solid conductors can also be terminated by simply pushing them in.

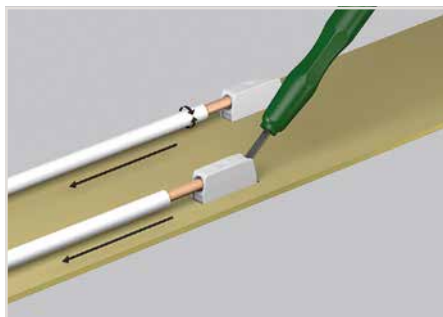

Use an operating tool or simply "twist and pull" to remove solid conductors.

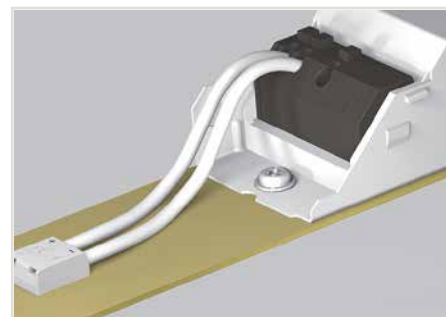

The printed variants offer unique pole marking on the back of the module.

Through-Board SMD PCB Terminal Block with Cover and Marking; 0.75 mm²


Pin Spacing: 6.5 mm

2070 Series


2





Dimensions (in mm):

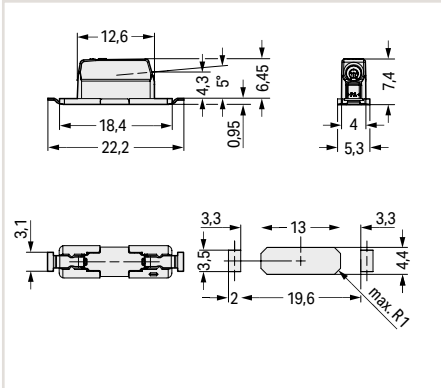


Dimensions (in mm):

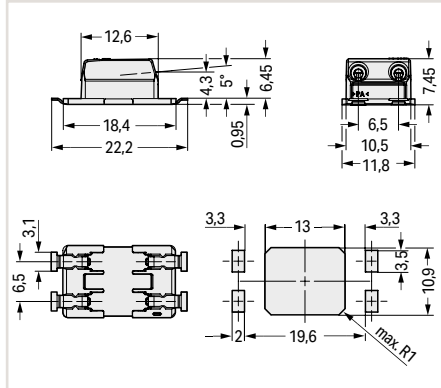


Dimensions (in mm):

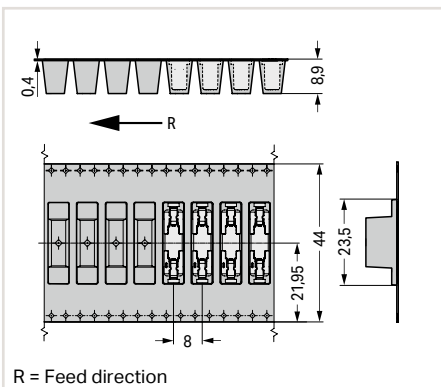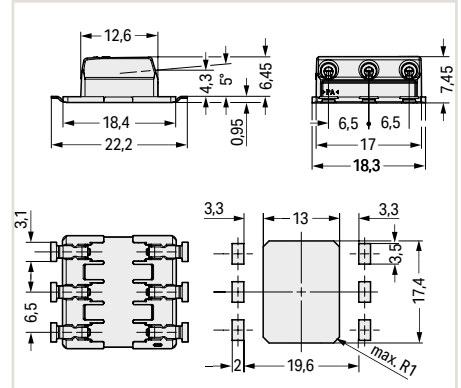

R = Feed direction

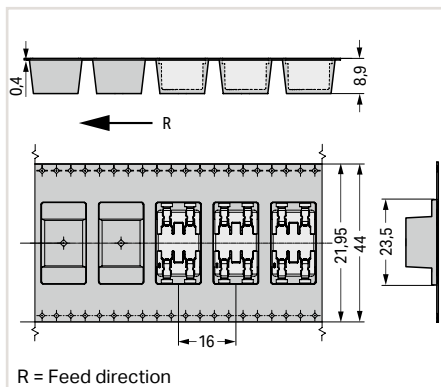

R = Feed direction

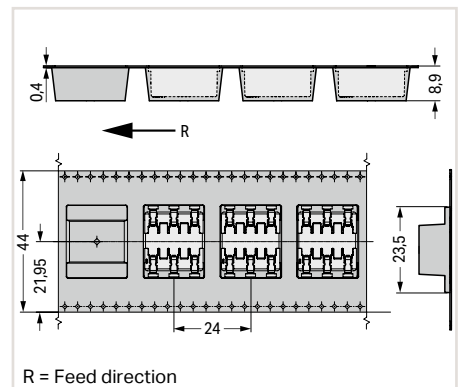

R = Feed direction

Through-board SMD PCB terminal block with cover and marking (-); in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
1	2070-541/998-406	4770 (954)

Through-board SMD PCB terminal block with cover and marking (+); in tape-and-reel packaging; 330 mm reel diameter


Pole No.	Item No.	Pack. Unit
2	2070-542/998-406	2385 (477)

Through-board SMD PCB terminal block with cover and marking (plain - +); in tape-and-reel packaging; 330 mm reel diameter

Pole No.	Item No.	Pack. Unit
3	2070-543/998-406	1590 (318)

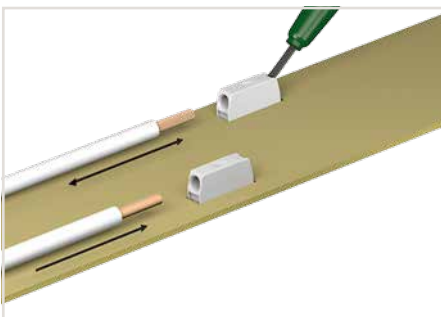

Insert fine-stranded conductors – and remove conductors – via operating tool. Solid conductors can also be terminated by simply pushing them in.

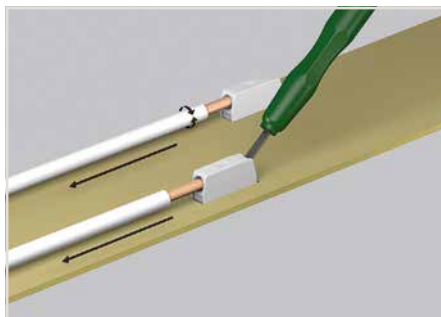

Use an operating tool or simply "twist and pull" to remove solid conductors.




The printed variants offer unique pole marking on the back of the module.

Operating Tool




Operating tool for 2070 Series	
Item No.	Pack. Unit
2070-400	1

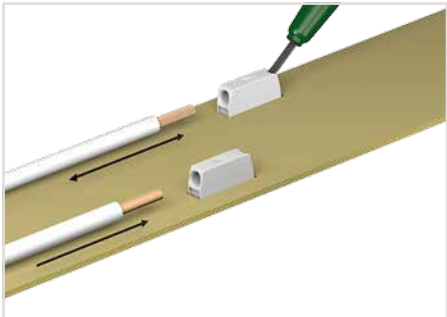

Insert fine-stranded conductors – and remove conductors – via operating tool. Solid conductors can also be terminated by simply pushing them in.

SMD PCB Terminal Block; 0.75 mm² 2065 Series

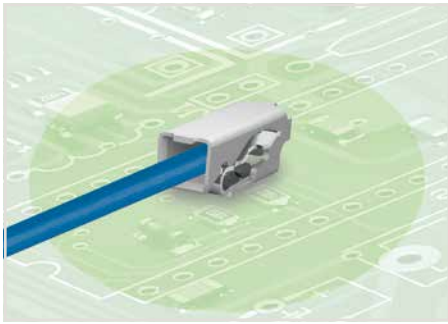

- SMD PCB terminal block with Push-in CAGE CLAMP® and Push-Button
- Connect solid conductors via push-in termination
- Convenient termination/removal of fine-stranded conductors via push-button and operating tool
- Just 2.7 mm tall
- Available in tape-and-reel packaging for automated assembly
- Also available in a PUSH WIRE® variant without push-button (only for solid conductors)

Electrical Data for Pin spacing		6.5 mm / 0.256 inch	6 mm / 0.236 inch
Connection technology		Push-in CAGE CLAMP®	PUSH WIRE®
Ratings per*		IEC/EN 60664-1	IEC/EN 60664-1
Rated voltage (III / 3)		320 V	250 V
Rated surge voltage (III / 3)		4 kV	4 kV
Rated voltage (III/2)		320 V	320 V
Rated surge voltage (III / 2)		4 kV	4 kV
Rated voltage (II / 2)		630 V	630 V
Rated surge voltage (II / 2)		4 kV	4 kV
Rated current		9 A	9 A
Approvals per		UL 1977	UL 1977
Rated voltage UL		600 V	600 V
Rated current UL		9 A	9 A
Connection Data			
Connection technology		Push-in CAGE CLAMP®	
Strip length		7.5 ... 9.5 mm / 0.3 ... 0,37 inch	
Conductor entry angle to the PCB		0°	
Conductor cross-sections			
Solid conductor		0.2 ... 0.75 mm ² / 24 ... 18 AWG	
Fine-stranded conductor		0.2 ... 0.75 mm ² / 24 ... 18 AWG	
Connection technology		PUSH WIRE®	
Strip length		7.5 ... 9.5 mm / 0.3 ... 0,37 inch	
Conductor entry angle to the PCB		0°	
Conductor cross-sections			
Solid conductor		0.2 ... 0.75 mm ² / 24 ... 18 AWG	
Material Data			
Limit temperature range		-60 ... +120 °C	
Clamping spring material		Chrome-nickel spring steel (CrNi)	
Contact material		Copper alloy	
Contact plating		Tin-plated	

NOTE: Terminal block without insulation housing!
Protection against accidental contact must be provided at voltages higher than low voltages (e.g., SELV/PELV) for the relevant application.

The layout must meet the requirements of the insulation coordination standard EN/IEC 60664-1 and applicable end product standards.

*(III / 2) ± Overvoltage category III /
Pollution degree 2

 Additional technical information,
see Volume 2, Section 13

 Approvals and corresponding ratings,
visit www.wago.com

PUSH-IN CAGE CLAMP®


PUSH WIRE®

SMD PCB Terminal Block; 0.75 mm² 2065 Series




2


Dimensions (in mm):

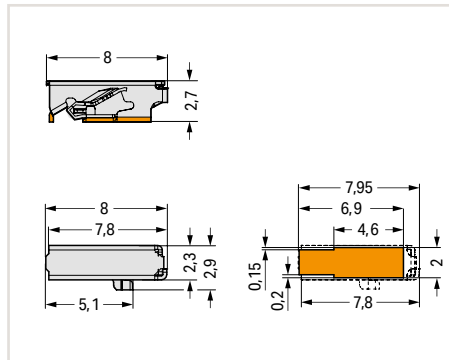



Dimensions (in mm):

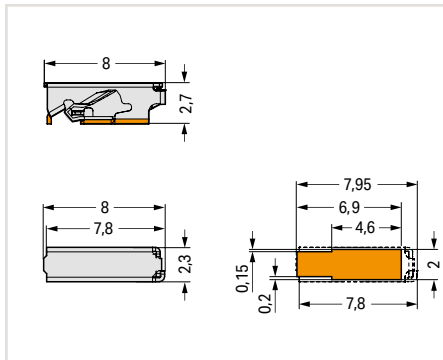

Dimensions (in mm):

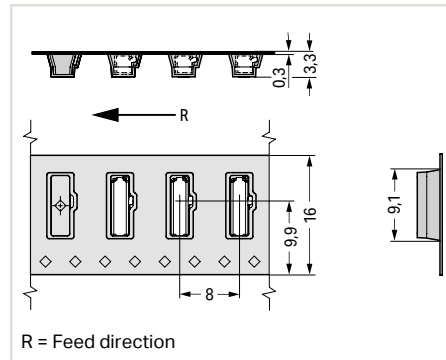

R = Feed direction

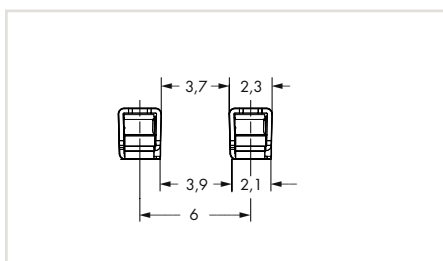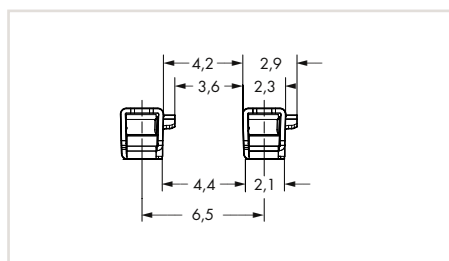

SMD PCB terminal block **with push-button**;
in tape-and-reel packaging; 330 mm reel diameter;
Push-in CAGE CLAMP®;
6.5 mm (0.256 inch) pin spacing


Pole No.	Item No.	Pack. Unit
1	2065-100/998-403	31800 (2650)

SMD PCB terminal block **without push-button**;
in tape-and-reel packaging; 330 mm reel diameter;
PUSH WIRE®;
6 mm (0.236 inch) pin spacing


Pole No.	Item No.	Pack. Unit
1	2065-101/998-403	31800 (2650)

Operating tool for 2065 Series


Item No.	Pack. Unit
2065-189	600 (50)

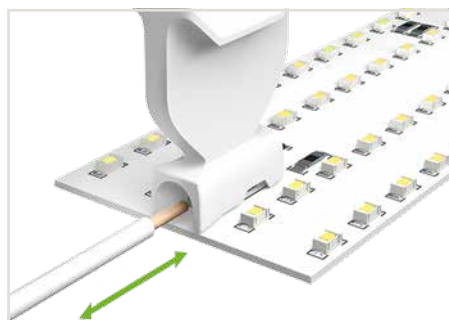

Push-in CAGE CLAMP® version:
Insert fine-stranded conductors – and remove all
conductors – via operating tool. Solid conductors
can be terminated by simply pushing them in.

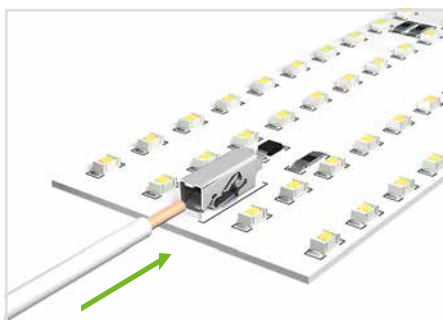


PUSH WIRE® version without push-button:
Even more space savings when using exclusively
solid conductors.

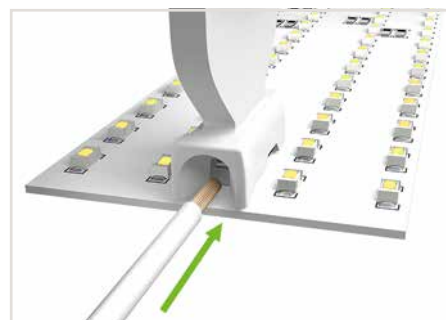

The operating tool's funneled conductor entry accurately
guides the conductor into the terminal block.

Board-to-Board Link for SMD PCB Terminal Blocks; 0.5 mm²; Pin Spacing: 3 mm 2059 Series

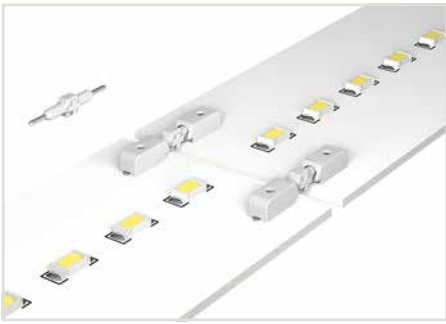

- Board-to-board links simplify LED module assembly
- Easy push-in connection and disconnection

Electrical Data for Pin Spacing

	3 mm / 0.118 inch
Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	63 V
Rated surge voltage (III / 3)	2.5 kV
Rated voltage (III / 2)	160 V
Rated surge voltage (III / 2)	2.5 kV
Nominal voltage (II / 2)	320 V
Rated surge voltage (II / 2)	2.5 kV
Rated Current	3 A

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Contact material	Copper alloy
Contact Plating	Silver-plated

*(III / 2) ± Overvoltage category III /
Pollution degree 2




Additional technical information,
see Volume 2, Section 13




Approvals and corresponding ratings,
visit www.wago.com

Board-to-Board Link for SMD PCB Terminal Blocks; 0.5 mm²;
Pin Spacing: 3 mm
2059 Series

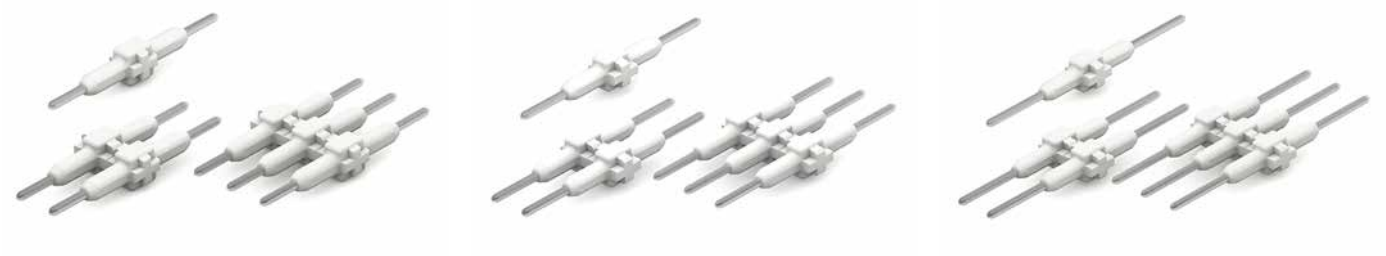

2


Dimensions (in mm):

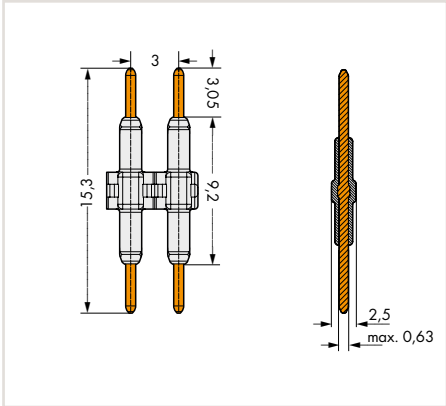

Board-to-board link for SMD PCB terminal blocks; 15.3 mm pin length; white; 3 mm (0.118 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2059-901	1500
2	2059-902	500
3	2059-903	375
4	2059-904	250


Dimensions (in mm):

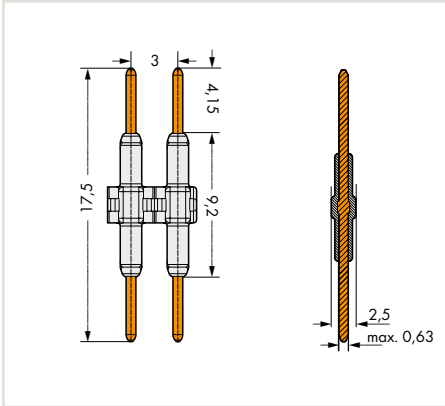

Board-to-board link for SMD PCB terminal blocks; 17.5 mm pin length; white; 3 mm (0.118 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2059-901/018-000	1500
2	2059-902/018-000	500
3	2059-903/018-000	375
4	2059-904/018-000	250

Dimensions (in mm):

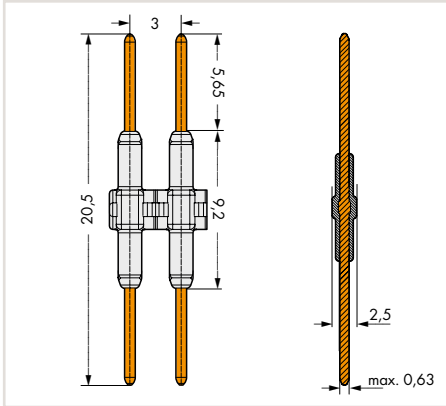


Board-to-board link for SMD PCB terminal blocks; 20.5 mm pin length; white; 3 mm (0.118 inch) pin spacing


Pole No.	Item No.	Pack. Unit
1	2059-901/021-000	1500
2	2059-902/021-000	500
3	2059-903/021-000	375
4	2059-904/021-000	250




Inserting a board-to-board link into the terminal block.

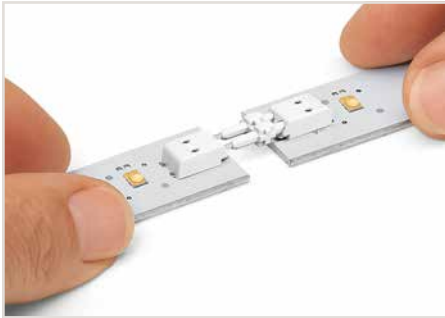

Assembly: Place PCBs on a flat surface and connect terminal blocks on adjoining PCBs via board-to-board link. Disassembly: Pull PCBs apart (max. 10 mating cycles).

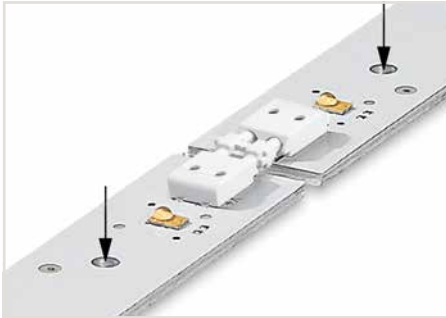

The PCBs must be secured.

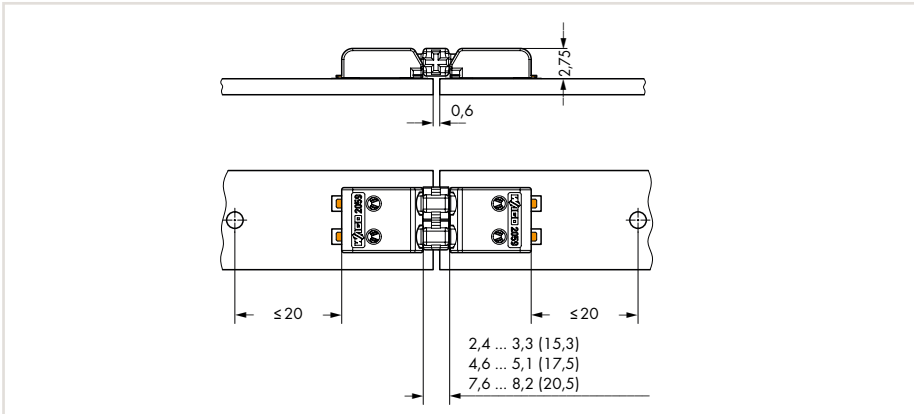

Board-to-Board Link for SMD PCB Terminal Blocks with Push-Buttons; 1.5 mm²; Pin Spacing: 6 mm 2061 Series



- Board-to-board links simplify LED module assembly
- Easy push-in connection and disconnection without push-button actuation

Electrical Data for Pin Spacing

Ratings per*	6 mm / 0.236 inch
Nominal voltage (III / 3)	IEC/EN 60664-1
Rated surge voltage (III / 3)	250 V
Rated voltage (III / 2)	4 kV
Rated surge voltage (III / 2)	320 V
Rated voltage (II / 2)	4 kV
Rated surge voltage (II / 2)	630 V
Rated current	4 kV
	9 A

Material Data

Material group	I
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... +105 °C
Contact material	Copper alloy
Contact Plating	Silver-plated

*(III / 2) ± Overvoltage category III /
Pollution degree 2



Additional technical information,
see Volume 2, Section 13




Approvals and corresponding ratings,
visit www.wago.com

Board-to-Board Link for SMD PCB Terminal Blocks with Push-Buttons;
1.5 mm²; Pin Spacing: 6 mm
2061 Series

2




Dimensions (in mm):

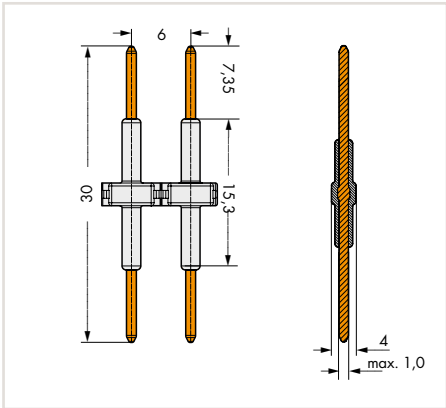

Board-to-board link for SMD PCB terminal blocks with push-buttons; white; 30 mm pin length; 6 mm (0.236 inch) pin spacing

Pole No.	Item No.	Pack. Unit
1	2061-901	700
2	2061-902	300
3	2061-903	200
4	2061-904	100

Dimensions (in mm):

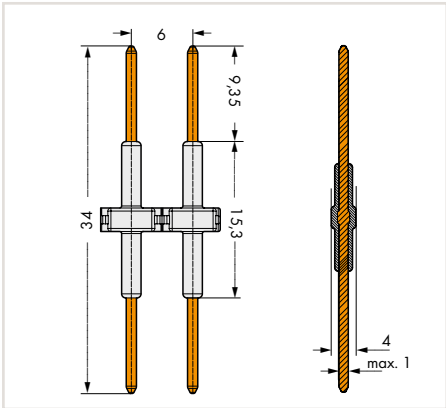


Board-to-board link for SMD PCB terminal blocks with push-buttons; white; 34 mm pin length; 6 mm (0.236 inch) pin spacing


Pole No.	Item No.	Pack. Unit
1	2061-901/034-000	700
2	2061-902/034-000	300
3	2061-903/034-000	200
4	2061-904/034-000	100




Inserting a board-to-board link into the terminal block.

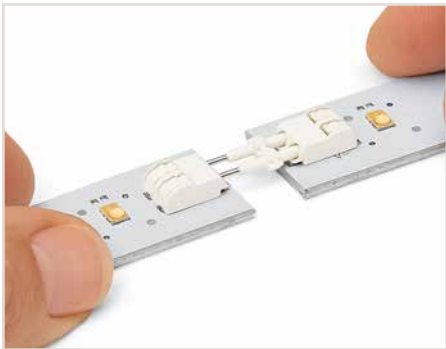

Assembly: Place PCBs on a flat surface and connect terminal blocks on adjoining PCBs via board-to-board link. Disassembly: Pull PCBs apart (max. 10 mating cycles).

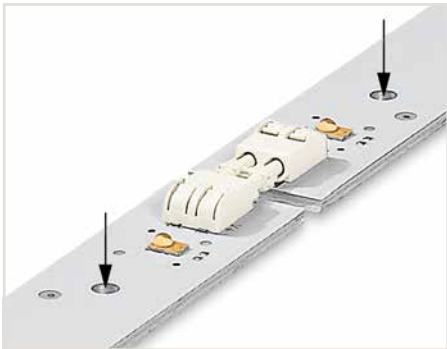


The PCBs must be secured.

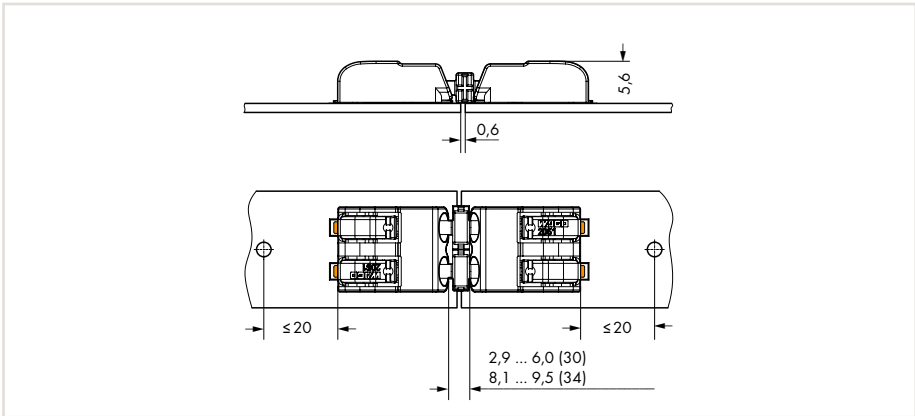

1-Conductor Female Connector with Levers

Pin Spacing: 10.16 mm

MCS MAXI 16

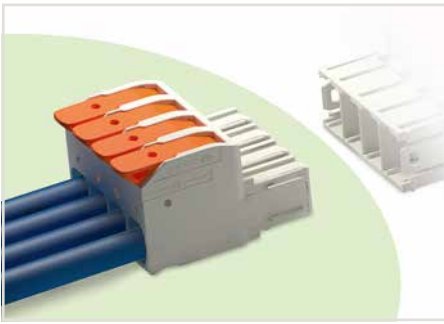

- Intuitive and tool-free lever actuation
- Universal connection for all conductor types
- Push-in termination of solid or ferruled conductors
- Test slot 0° and 90° to conductor entry
- 100% protected against mismatching
- Coding via coding fingers

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	1000 V
Rated surge voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Nominal voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	76 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	18 ... 20 mm / 0.71 ... 0.79 inch
Conductor range	
Solid conductor	0.75 ... 16 mm ² / 18 ... 4 AWG
Fine-stranded conductor	0.75 ... 25 mm ² / 18 ... 4 AWG
Fine-stranded conductor with insulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor with uninsulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor, with twin ferrule	0.75 ... 6 mm ²

Material Data

Material group	I
Insulating material	Polybutylene terephthalate (PBT)
Flammability class per UL94	V0
Limit temperature range	-60 ... +120 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Silver-plated
Additional springs for socket contact	Chrome nickel spring steel (CrNi)

The *MULTI CONNECTION SYSTEM (MCS)* is designed without breaking capacity for compliance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

* (III / 2) ± Overvoltage category III /
Pollution degree 2

 Coding pins,
see page 70

 Additional technical information,
see Volume 2, Section 13

 Approvals and corresponding ratings,
visit www.wago.com


1-Conductor Female Connector with Levers

Pin Spacing: 10.16 mm

MCS MAXI 16




Dimensions (in mm):

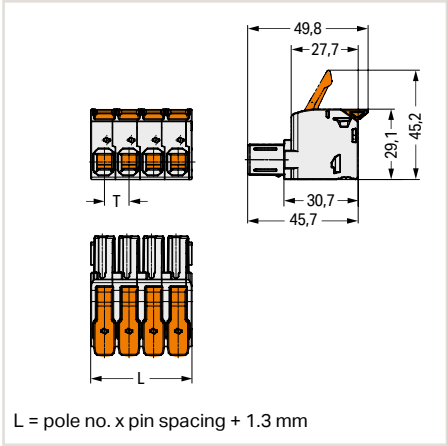

1-conductor female connector with levers;
light gray; 10.16 mm (0.4 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	832-1102	50
3	832-1103	50
4	832-1104	20
5	832-1105	20
6	832-1106	10

Dimensions (in mm):

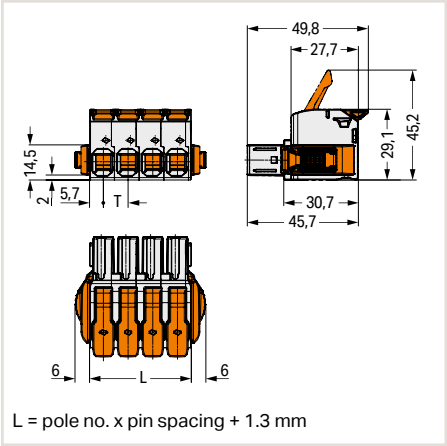

1-conductor female connector with levers and
locking lever; light gray;
10.16 mm (0.4 inch) pin spacing

Pole No.	Item No.	Pack. Unit
2	832-1102/037-000	25
3	832-1103/037-000	25
4	832-1104/037-000	20
5	832-1105/037-000	10
6	832-1106/037-000	10


Available upon request (depending on quantity required):

- Other pole numbers

THT Male Header

Pin Spacing: 10.16 mm

MCS MAXI 16

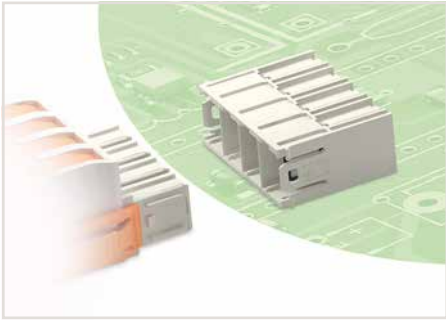

- Male header may be mounted horizontally or vertically via straight or angled solder pins
- Three solder pins per pole provide high electrical and mechanical stability
- Mating face (IP2XB) with higher protection against accidental contact
- 100% protected against mismatching
- Coding via coding fingers

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	800 V
Rated surge voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Nominal voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	76 A

Solder Pin Data

Solder pin length	4 mm
Solder pin dimensions	1.2 x 1.2 mm
Drilled hole diameter	1.7 ^{+0.1} mm

Material Data

Material group	I
Insulating material	Polybutylene terephthalate (PBT)
Flammability class per UL94	V0
Limit temperature range	-60 ... +120 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Silver-plated

The *MULTI CONNECTION SYSTEM (MCS)* is designed without breaking capacity for compliance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

*(III / 2) $\hat{=}$ Overvoltage category III /
Pollution degree 2

 Coding pins,
see page 70

 Additional technical information,
see Volume 2, Section 13

 Approvals and corresponding ratings,
visit www.wago.com


THT Male Header

Pin Spacing: 10.16 mm



MCS MAXI 16





Dimensions (in mm):

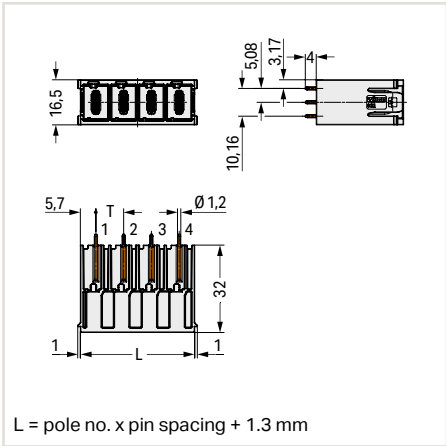


Dimensions (in mm):

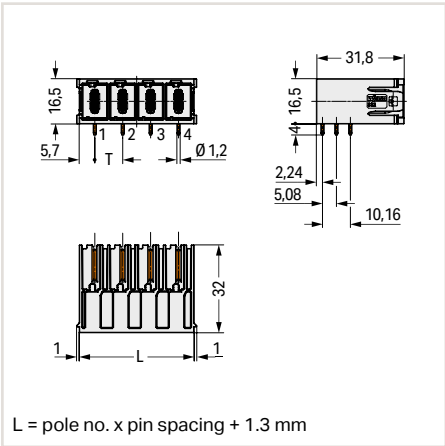


Dimensions (in mm):

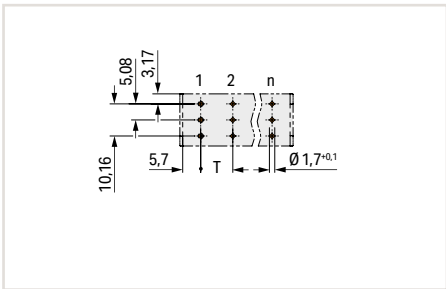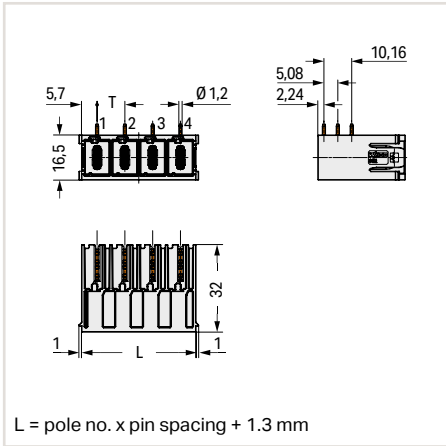

THT male header; with straight solder pins; 3 solder pins/pole; light gray; 10.16 mm (0.4 inch) pin spacing		
Pole No.	Item No.	
2	832-3602	
3	832-3603	
4	832-3604	
5	832-3605	
6	832-3606	

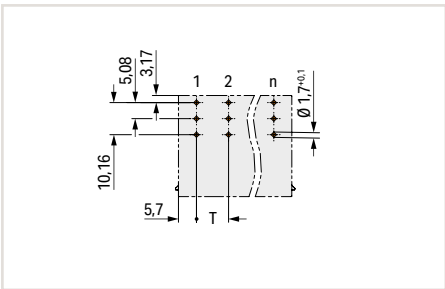

THT male header; with upward-angled solder pins; 3 solder pins/pole; light gray; 10.16 mm (0.4 inch) pin spacing		
Pole No.	Item No.	
2	832-3622	
3	832-3623	
4	832-3624	
5	832-3625	
6	832-3626	

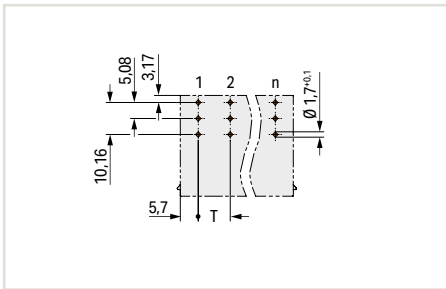

THT male header; with downward-angled solder pins; 3 solder pins/pole; light gray; 10.16 mm (0.4 inch) pin spacing		
Pole No.	Item No.	
2	832-3642	
3	832-3643	
4	832-3644	
5	832-3645	
6	832-3646	


Available upon request (depending on quantity required):

- Other pole numbers
- Protection against PCB mounting errors

1-Conductor Male Connector with Levers

Pin Spacing: 10.16 mm

MCS MAXI 16

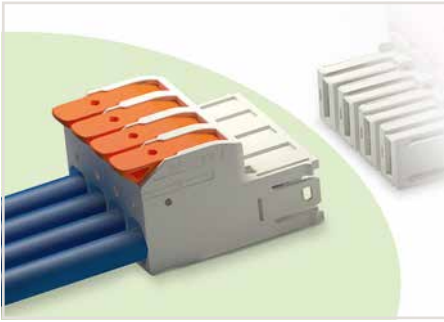

- Universal connection for all conductor types
- Push-in termination of solid or ferruled conductors
- Test slot 0° and 90° to conductor entry
- Intuitive and tool-free operation
- 100% protected against mismatching
- Coding via coding fingers

Electrical Data

Ratings per*	IEC/EN 60664-1
Nominal voltage (III / 3)	1000 V
Rated surge voltage (III / 3)	8 kV
Rated voltage (III / 2)	1000 V
Rated surge voltage (III / 2)	8 kV
Nominal voltage (II / 2)	1000 V
Rated surge voltage (II / 2)	8 kV
Rated current	76 A

Connection Data

Connection technology	Push-in CAGE CLAMP®
Strip length	18 ... 20 mm / 0.71 ... 0.79 inch
Conductor range	
Solid conductor	0.75 ... 16 mm ² / 18 ... 4 AWG
Fine-stranded conductor	0.75 ... 25 mm ² / 18 ... 4 AWG
Fine-stranded conductor with insulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor with uninsulated ferrule	0.75 ... 16 mm ²
Fine-stranded conductor, with twin ferrule	0.75 ... 6 mm ²

Material Data

Material group	I
Insulating material	Polybutylene terephthalate (PBT)
Flammability class per UL94	V0
Limit temperature range	-60 ... +120 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Silver-plated

The *MULTI CONNECTION SYSTEM (MCS)* is designed without breaking capacity for compliance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

*(III / 2) ± Overvoltage category III /
Pollution degree 2

 Coding pins,
see page 70

 Additional technical information,
see Volume 2, Section 13

 Approvals and corresponding ratings,
visit www.wago.com


1-Conductor Male Connector with Levers

Pin Spacing: 10.16 mm

MCS MAXI 16



Dimensions (in mm):

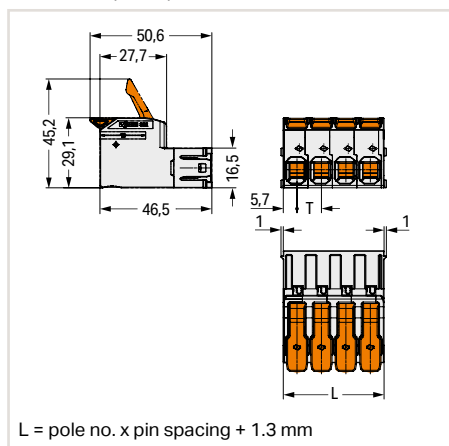

1-conductor male connector with levers;
light gray; 10.16 mm (0.4 inch) pin spacing

Pole No.	Item No.
2	832-1202
3	832-1203
4	832-1204
5	832-1205
6	832-1206

Available upon request (depending on quantity required):

- Other pole numbers


Coding Pins

MCS MAXI 16



Coding pin carrier; with five coding pins;
for male headers and female connectors; orange

Item No.	Pack. Unit
832-500	100 (25)

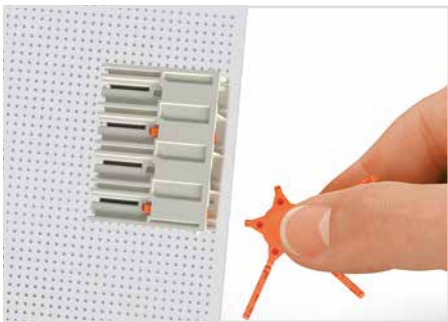


Coding a THT male header by inserting a coding pin.

Snap-In Frames and Lockout Pins

MCS MAXI 6




Dimensions (in mm):

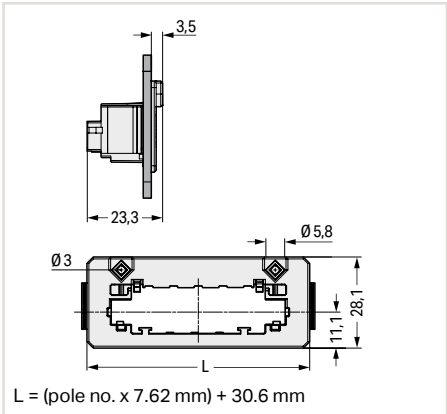


Snap-in frame for MCS MAXI male connectors; light gray			
Pole No.	Width	Item No.	Pack. Unit
2	45.84 mm	831-302	48
3	53.46 mm	831-303	48
4	61.08 mm	831-304	24
5	68.7 mm	831-305	12

Dimensions (in mm):

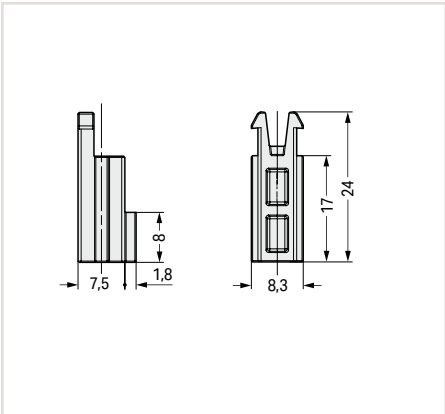


Lockout pins for snap-in frames; light gray	
Item No.	Pack. Unit
831-321	100

Dimensions (in mm):

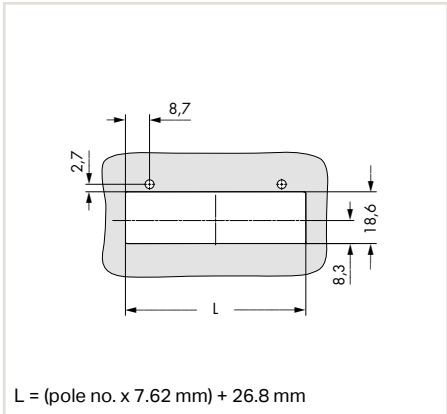


Panel cutout for snap-in frame

- Snap-in frames for through-panel MCS MAXI 6 connectors
- Fast and easy installation – without tools
- Compatible with MCS MAXI 6 male and female connectors
- For panel thickness ranging from 0.5 to 2.5 mm
- Optional screw mounting

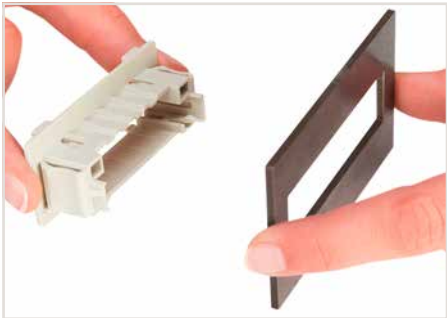

Insert the snap-in frame into the cutout.

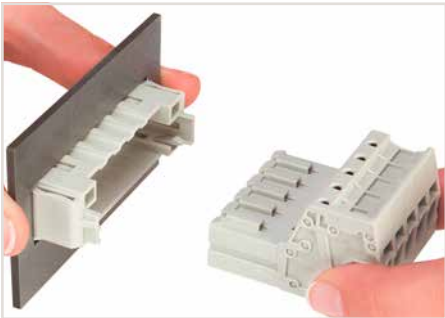



Insert the male connector into the snap-in frame.



Inserting a female connector equipped with lateral locking levers.



Inserting a female connector without lateral locking levers – lockout pins are inserted on both sides of the snap-in frame.

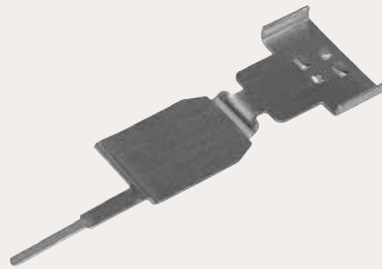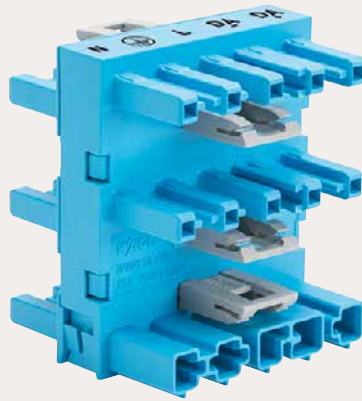

Volume 5, *WINSTA*® – The Pluggable Connection System

Volume 5; WINSTA® – The Pluggable Connection System Content


	Page
	WINSTA® MINI Shield connecting plate; for socket and plug; 5-pole 62
	WINSTA® MIDI Distribution connector; 5-way 63

WINSTA® MINI


Shield Connecting Plate; 5-Pole

890 Series

1

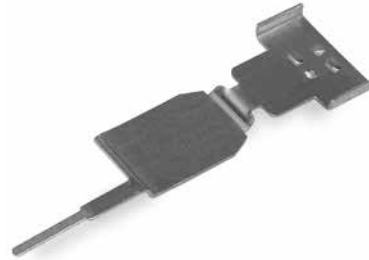

Shield connecting plate; for socket; 5-pole		
	Item No.	Pack. Unit
	890-526	50

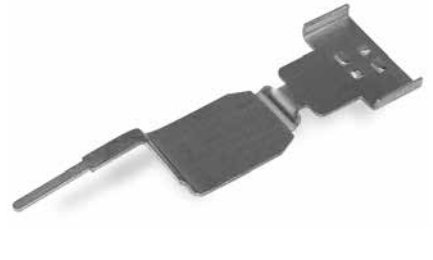

Shield connecting plate; for plug; 5-pole		
	Item No.	Pack. Unit
	890-527	50

 890 Series and 770 Series Accessories,
see Full Line Catalog, Volume 5

 Approvals,
see www.wago.com


 Coding Overview,
see Full Line Catalog, Volume 5

WINSTA® MIDI
Distribution Connector; 5-Pole
770 Series

Rated voltage	400 V
Rated current	25 A



Dimensions in mm

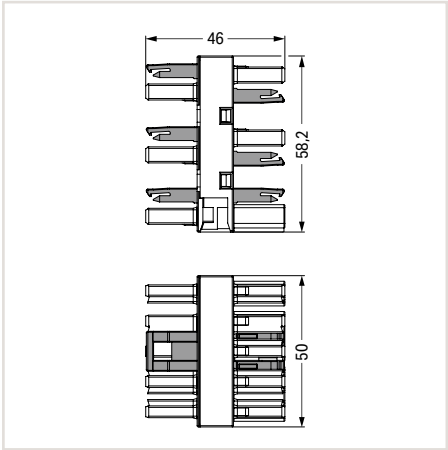

Distribution connector; 5-way;
1 x plug/5 x socket

Color	Item No.	Pack. Unit
● blue	770-1947	50

3

Coding	Marking	Color
I	N Ⓢ L DA- DA+	● blue

Micro-WSB Inline Markers

1



Micro-WSB Inline markers; plain; 2,000 markers (4 mm) per reel; not stretchable			
for:	Color	Item No.	Pack. Unit
Modular Empty Housing, 2857 Series	○ white	2009-141	1



Micro-WSB Inline markers are compatible with 2857 Series Modular Empty Housings.

Circuit ID Labels and Marking Strips



Circuit ID labels; self-adhesive; plain; 750 labels/roll; single-row; divided into two fields		
Color	Item No.	Pack. Unit
○ white	210-813	1

Circuit ID labels; self-adhesive; plain; 750 labels/roll; single-row; divided into three fields		
Color	Item No.	Pack. Unit
○ white	210-814	1

Marking strip; self-adhesive; plain; 20 m/reel; 30 mm wide		
Color	Item No.	Pack. Unit
● yellow	210-874/000-002	1

Marking strip; self-adhesive; plain; 20 m/reel; 12.7 mm wide; for Siemes ET200		
Color	Item No.	Pack. Unit
○ white	210-880	1
● yellow	210-880/000-002	1

Marking strip; self-adhesive; plain; 20 m/reel; 22.6 mm wide; for Siemes S7		
Color	Item No.	Pack. Unit
○ white	210-882	1
● yellow	210-882/000-002	1

3

Cutter for *smart*PRINTER



Cutter for *smart*PRINTER; only for marking strips;
not suitable for WMB Inline markers

Item No.	Pack. Unit
258-5030	1

Hardware requirements:

- Printer model: *smart*PRINTER
- From manufacturing month/year: 0814 – August 2014
- Firmware version: 1.UW7i
- Printer driver: Version 7.4.2

Software requirements:

- *smart*SCRIPT: Version 3.88.9.0 or higher
- WAGO Printer Settings: Version 2.4.0.0 or higher

Approved print material to be cut:

- Marking Strips: 2009-110, 709-177, 709-178, 757-901/000-005
- Self-Adhesive Marking Strips: 210-702, 210-870 ... -877
- Cable Tie Markers: 211-835 ... -836, 211-836/000-002
- Self-Laminating Labels: 211-855 ... -857
- Conductor Markers for Thread-On Mounting: 211-861 ... -863
- Type Labels: 210-801 ... -804, 210-812
- Continuous Labels: 210-831 ... -834
- Label for Circuit Identification: 210-813, 210-814

Dimensions of printing materials:


- Width (max.): 46 mm
- Thickness (max.): 250 µm



Technical Data

Width	60 mm
Height	107 mm
Depth	131 mm
Weight	1050 g

Ink Ribbon for *smart*PRINTER



Thermal transfer ink ribbon for <i>smart</i> PRINTER; suitable for all markers in every WAGO product line; 50 mm wide x 74 m		
Color	Item No.	Pack. Unit
● red	258-5005/000-005	1

Item Number Index

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
210 Series		793 Series		887 Series		2009 Series	
210-334	13	793-5501	5	887-917	10	2009-414	5
		793-5501/000-002	5	887-918	10	2009-414/000-005	4
210-702	66	793-5501/000-005	5	887-950	11	2009-414/000-006	4
210-719	9	793-5501/000-006	5	887-952	10	2009-416	5
		793-5501/000-007	5	887-953	11		
210-801	66	793-5501/000-012	5	887-955	11	2042 Series	
210-812	66	793-5501/000-017	5			2042-321	5
210-813	65	793-5501/000-023	5	890 Series		2042-331	5
210-813	65	793-5501/000-024	5	890-526	62	2042-341	5
210-813	66			890-527	62	2042-351	5
210-814	65	831 Series					
210-814	65	831-302	59	2002 Series		2059 Series	
210-814	66	831-303	59	2002-115	5	2059-901	49
210-814	66	831-304	59			2059-901/018-000	49
210-831	66	831-305	59	2002-402	5	2059-901/021-000	49
210-870	66	831-321	59	2002-403	5	2059-902	49
210-874/000-002	65			2002-404	5	2059-902/018-000	49
210-874/000-002	65	832 Series		2002-405	5	2059-902/021-000	49
210-880	65	832-500	58	2002-406	5	2059-903	49
210-880	65			2002-407	5	2059-903/018-000	49
210-880/000-002	65	832-1102	53	2002-408	5	2059-903/021-000	49
210-880/000-002	65	832-1102/037-000	53	2002-409	5	2059-904	49
210-882	65	832-1103	53	2002-410	5	2059-904/018-000	49
210-882	65	832-1103/037-000	53	2002-433	5	2059-904/021-000	49
210-882/000-002	65	832-1104	53	2002-434	5		
210-882/000-002	65	832-1104/037-000	53	2002-435	5	2061 Series	
		832-1105	53	2002-436	5	2061-901	51
211 Series		832-1105/037-000	53	2002-437	5	2061-901/034-000	51
211-835	66	832-1106	53	2002-438	5	2061-902	51
211-836/000-002	66	832-1106/037-000	53	2002-439	5	2061-902/034-000	51
211-855	66			2002-440	5	2061-903	51
211-861	66	832-1202	57	2002-472	5	2061-903/034-000	51
		832-1203	57	2002-473	5	2061-904	51
221 Series		832-1204	57	2002-474	5	2061-904/034-000	51
221-510	13	832-1205	57	2002-475	5		
		832-1206	57	2002-476	5	2065 Series	
221-612	13			2002-477	5	2065-100/998-403	47
221-613	13	832-3602	55	2002-478	5	2065-101/998-403	47
221-615	13	832-3603	55	2002-479	5	2065-189	47
		832-3604	55	2002-480	5		
258 Series		832-3605	55	2002-481	5	2070 Series	
258-5005/000-005	67	832-3606	55	2002-482	5	2070-400	45
258-5030	66	832-3622	55			2070-451/998-406	41
		832-3623	55	2002-1661	5	2070-452/998-406	41
280 Series		832-3624	55	2002-1691	5	2070-453/998-406	41
280-470	8	832-3625	55	2002-1692	5	2070-461/998-406	42
280-471	8	832-3626	55			2070-462/998-406	42
280-472	8	832-3642	55	2002-1761	5	2070-463/998-406	42
		832-3643	55	2002-1791	5		
282 Series		832-3644	55	2002-1792	5		
282-435/300-000	4	832-3645	55			2070-521/998-406	43
		832-3646	55	2002-1861	5	2070-522/998-406	43
				2002-1891	5	2070-523/998-406	43
709 Series		870 Series		2002-1892	5	2070-541/998-406	44
709-107	9	870-402	8			2070-542/998-406	44
709-177	66	870-403	8	2002-1961	5	2070-543/998-406	44
709-178	66	870-404	8	2002-1991	5		
		870-405	8	2002-1992	5	2604 Series	
726 Series		870-405/011-000	8			2604-1101	17
726-780	9	870-406	8	2003 Series		2604-1102	17
		870-406/020-000	8	2003-499	6	2604-1103	17
726-800	9	870-407	8			2604-1104	17
726-801	9	870-407/011-000	8	2003-500	6	2604-1105	17
		870-408	8			2604-1106	17
726-905	9	870-409	8	2003-911	6	2604-1107	17
		870-409/011-000	8	2003-911/1000-923	6	2604-1108	17
		870-410	8			2604-1109	17
757 Series		870-433	8	2003-6661	6	2604-1110	17
757-901/000-005	66	870-434	8	2003-6692	6	2604-1111	17
		870-435	8	2003-6693	6	2604-1112	17
769 Series		870-436	8	2003-6694	6		
769-101	8	870-437	8			2604-1302	17
769-101/022-000	8	870-438	8	2004 Series		2604-1303	17
		870-439	8	2004-911	6	2604-1304	17
769-435	8					2604-1305	17
769-438	8	870-440	8	2009 Series		2604-1306	17
769-439	8	870-1131	8	2009-110	9	2604-1307	17
		870-1137	8	2009-115	9	2604-1308	17
770 Series		870-1138	8	2009-141	64	2604-1309	17
770-1947	63	870-1148	8			2604-1310	17
		870-1149	8	2009-412	5	2604-1311	17

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
2604 Series		2616 Series		2624 Series			
2604-1312	17	2616-1103/020-000	25	2624-3309	31		
		2616-1104/020-000	25	2624-3310	31		
2604-1502	17	2616-1105/020-000	25	2624-3311	31		
2604-1503	17	2616-1106/020-000	25	2624-3312	31		
2604-1504	17	2616-1107/020-000	25				
2604-1505	17	2616-1108/020-000	25	2624-3502	31		
2604-1506	17	2616-1109/020-000	25	2624-3503	31		
2604-1507	17	2616-1110/020-000	25	2624-3504	31		
2604-1508	17	2616-1111/020-000	25	2624-3505	31		
2604-1509	17	2616-1112/020-000	25	2624-3506	31		
2604-1510	17			2624-3507	31		
2604-1511	17	2616-3101	27	2624-3508	31		
2604-1512	17	2616-3102/020-000	27	2624-3509	31		
		2616-3103/020-000	27	2624-3510	31		
2604-3101	19	2616-3104/020-000	27	2624-3511	31		
2604-3102	19	2616-3105/020-000	27	2624-3512	31		
2604-3103	19	2616-3106/020-000	27				
2604-3104	19	2616-3107/020-000	27	2626 Series			
2604-3105	19	2616-3108/020-000	27	2626-1101	33		
2604-3106	19	2616-3109/020-000	27	2626-1102/020-000	33		
2604-3107	19	2616-3110/020-000	27	2626-1103/020-000	33		
2604-3108	19	2616-3111/020-000	27	2626-1104/020-000	33		
2604-3109	19	2616-3112/020-000	27	2626-1105/020-000	33		
2604-3110	19			2626-1106/020-000	33		
2604-3111	19	2624 Series		2626-1107/020-000	33		
2604-3112	19	2624-1101	29	2626-1108/020-000	33		
		2624-1102	29	2626-1109/020-000	33		
2604-3302	19	2624-1103	29	2626-1110/020-000	33		
2604-3303	19	2624-1104	29	2626-1111/020-000	33		
2604-3304	19	2624-1105	29	2626-1112/020-000	33		
2604-3305	19	2624-1106	29				
2604-3306	19	2624-1107	29	2626-3101	35		
2604-3307	19	2624-1108	29	2626-3102/020-000	35		
2604-3308	19	2624-1109	29	2626-3103/020-000	35		
2604-3309	19	2624-1110	29	2626-3104/020-000	35		
2604-3310	19	2624-1111	29	2626-3105/020-000	35		
2604-3311	19	2624-1112	29	2626-3106/020-000	35		
2604-3312	19			2626-3107/020-000	35		
		2624-1302	29	2626-3108/020-000	35		
2604-3502	19	2624-1303	29	2626-3109/020-000	35		
2604-3503	19	2624-1304	29	2626-3110/020-000	35		
2604-3504	19	2624-1305	29	2626-3111/020-000	35		
2604-3505	19	2624-1306	29	2626-3112/020-000	35		
2604-3506	19	2624-1307	29				
2604-3507	19	2624-1308	29	2636 Series			
2604-3508	19	2624-1309	29	2636-1101	37		
2604-3509	19	2624-1310	29	2636-1102/020-000	37		
2604-3510	19	2624-1311	29	2636-1103/020-000	37		
2604-3511	19	2624-1312	29	2636-1104/020-000	37		
				2636-1105/020-000	37		
2604-3512	19	2624-1502	29	2636-1106/020-000	37		
		2624-1503	29	2636-1107/020-000	37		
2606 Series		2624-1504	29	2636-1108/020-000	37		
2606-1101	21	2624-1505	29	2636-1109/020-000	37		
2606-1102/020-000	21	2624-1506	29	2636-1110/020-000	37		
2606-1103/020-000	21	2624-1507	29	2636-1111/020-000	37		
2606-1104/020-000	21	2624-1508	29	2636-1112/020-000	37		
2606-1105/020-000	21	2624-1509	29				
2606-1106/020-000	21	2624-1510	29	2636-3101	39		
2606-1107/020-000	21	2624-1511	29	2636-3102/020-000	39		
2606-1108/020-000	21	2624-1512	29	2636-3103/020-000	39		
2606-1109/020-000	21			2636-3104/020-000	39		
2606-1110/020-000	21	2624-3101	31	2636-3105/020-000	39		
2606-1111/020-000	21	2624-3102	31	2636-3106/020-000	39		
2606-1112/020-000	21	2624-3103	31	2636-3107/020-000	39		
		2624-3104	31	2636-3108/020-000	39		
2606-3101	23	2624-3105	31	2636-3109/020-000	39		
2606-3102/020-000	23	2624-3106	31	2636-3110/020-000	39		
2606-3103/020-000	23	2624-3107	31	2636-3111/020-000	39		
2606-3104/020-000	23	2624-3108	31	2636-3112/020-000	39		
2606-3105/020-000	23	2624-3109	31				
2606-3106/020-000	23	2624-3110	31				
2606-3107/020-000	23	2624-3111	31				
2606-3108/000-000	23	2624-3112	31				
2606-3109/020-000	23						
2606-3110/020-000	23	2624-3302	31				
2606-3111/020-000	23	2624-3303	31				
2606-3112/020-000	23	2624-3304	31				
		2624-3305	31				
2616 Series		2624-3306	31				
2616-1101	25	2624-3307	31				
2616-1102/020-000	25	2624-3308	31				

WAGO Worldwide Companies and Representatives

Algeria
please contact WAGO France

Argentina
Bruno Schillig S.A.
Arenales 4030, B1604CFD
Florida, PBA
Phone +54 11 4730 1100
Fax +54 11 4761 7244
wago@schillig.com.ar

Australia
WAGO Pty. Ltd.
2-4 Overseas Drive
Noble Park Victoria 3174
Phone +61 03 8791 6300
Fax +61 03 9701 0177
sales.anz@wago.com

**NHP ELECTRICAL ENGINEERING
PRODUCTS PTY LTD**
43-67 River Street
Richmond, Victoria, 3121
P.O. Box 199
Phone +61 3 9429 2999
Fax +61 3 9429 1075
export@wago.com

Austria
WAGO Kontakttechnik Ges.m.b.H.
Europaring F15 602
Campus 21
2345 Brunn am Gebirge
Phone +43 1 6150780
Fax +43 1 6150775
wago-at@wago.com

Azerbaijan
AZ Technics LTD
Yulfi V. Alizade
Y.Safarov str.33, AZ1025,
Baku
Phone +994 50 210 24 49
Fax +994 12 496 83 34
info@AZtechnics.az

Bangladesh
please contact WAGO India

Belarus
OOO FEK
pr-t Pushkina 29-B
220015 Minsk
Phone +375 17 2102189
Fax +375 17 2102189
wago@fek.by

UP ATAVA
ul. Denisovskaya, 47, office 1
220006 Minsk
Phone +375 17 2054015
Fax +375 17 2851759

Belgium
WAGO BeLux nv
Excelsiorlaan 11
1930 Zaventem
Phone +32 2 717 9090
Fax +32 2 717 9099
info-be@wago.com

Bolivia
ISOTEK S.R.L.
Zona Casco Viejo
Calle Isso #578, B/San Roque
Santa Cruz
Phone +591 721 000 27
info@isotek.bo

Bosnia & Herzegovina
please contact WAGO Bulgaria

ELEKTRON d.o.o. GRUDE
Hrvatskih branitelja 46
88340 GRUDE
Phone 00387 39/674 404
Fax 00387 39/674 406
elektron@tel.net.ba

Brazil
WAGO Eletroeletrônicos Ltda
Rua Tripoli, 640, Lotamento Multivias II
Jardim Ermida I
Jundiaí - SP
CEP 13212-217
Phone +55 (11) 2923 7200
info.br@wago.com

Bulgaria
WAGO Kontakttechnik GmbH & Co. KG
Representative Office Sofia
Business Center Serdika
2E Akad. Ivan Geshov Blvd.
Building 1, Floor 4, Office 417
1330 Sofia
Phone +359 2 489 46 09/10
Fax +359 2 928 28 50
info-BG@wago.com

Canada
please contact WAGO USA

Chile
Desimat Chile
Av Puerto Vespuccio 9670
Pudahuel Santiago
Phone +56 2 747 0152
Fax +56 2 747 0153
ventaschile@desimat.cl

China
WAGO Electronic (Tianjin) Co., Ltd.
No.5, Quan Hui Road
Wuqing Development Area
Tianjin 301700
Phone +86 22 5967 7688
Fax +86 22 5961 7668
info-cn@wago.com

Colombia
T.H.L. Ltda.
Cra. 49 B # 91-33
Bogotá
Phone +57 1 621 85 50
Fax +57 1 621 60 28
ventas-thl2@thl.com.co

Croatia
M.B.A. d.o.o.
Frana Supila 5
51211 Matulji
Phone +385 51 275-736
Fax +385 51 275-066
mba@ri.htnet.hr

MICROSTAR d.o.o.
Siget 18 b
10020 Zagreb
Phone +385 1 3647 849
Fax +385 1 3636 662
wago@microstar.hr

Czech Republic
WAGO Elektro spol. sr. o.
Rozvodova 1116/36
143 00 Praha 4 - Modřany
Phone +420 261 090 143
Fax +420 261 090 144
info.cz@wago.com
wago-cz@wago.com

Denmark
WAGO Denmark A/S
Lejrevej 17
3500 Værløse
Phone +45 44 357 777
info.dk@wago.com

Ecuador
ECUAINSETEC CIA LTDA
Yugoslavia N34-110 y Azuay
Quito
Phone +593 2 24 50 475
Fax +593 2 22 51 242
g.castro@ecuainsetec.com.ec

Egypt
KENANA Automation / System Integrator
(Water & Waste Water)
2 Building 10, Block 31
Ibrahim Shehata Street
Nasr City
Cairo, Egypt
Phone +2 01 02899 3434
Fax +2 02 357 3353
mohamed.bahgat@kenanaeg.com

IBN Engineering / Distributor
(Automation Products)
Phone +2 02 3721 4350
Fax +2 02 3722 1709
nasrelwry@ibnengineering.com

**Barkouky Electric / System Integrator (Building
Management)**
Phone +2 02 2269 1192
Fax +2 02 2269 1193
ahmed@barkouky.com.eg

Estonia
Eltarko OÜ
Laki 14 - 502
10621 Tallinn
Phone +372 651 7731
Fax +372 651 7786
andres@eltarko.ee

Finland
WAGO Finland Oy
Perintötie 2 C
01510 Vantaa
Phone +358 9 7744 060
Fax +358 9 7744 0660
tilaus@wago.fi

France
WAGO Contact SAS
Paris Nord 2
83 Rue des Chardonnerets
B.P. 55065 - Tremblay en France
95947 - ROISSY CDG CEDEX
Phone +33 1 4817 2590
Fax +33 1 4863 2520
info-fr@wago.com

Germany
WAGO Kontakttechnik GmbH & Co. KG
Postfach 28 80, 32385 Minden
Hansastraße 27
32423 Minden
Phone +49 571 887-0
Fax +49 571 887-169
info@wago.com

WAGO Kontakttechnik GmbH & Co. KG
Waldstraße 1
99706 Sondershausen
Phone +49 3632 659-0
Fax +49 3632 659-100
info@wago.com

Great Britain
WAGO Limited
Triton Park, Swift Valley Industrial Estate
RUGBY
Warwickshire, CV21 1SG
Phone +44 1788 568 008
Fax +44 1788 568 050
uksales@wago.com

Greece
PANAGIOTIS SP.DIMOULAS
DIMOULAS AUTOMATIONS
Kritis Str. 26
10439 Athens
Phone +30 210 883 3337
Fax +30 210 883 4436
wago.info@dimoulas.com.gr

Honduras
CILASAS S.A. de C.V.
Barrio Los Andes
7 Calle entre 14 y 15 Ave. N.O.
P.O. Box. 1061
San Pedro Sula
Phone +504 2557 1146/7
Fax +504 2557 1149
ventas@ieclasa.com

Hong Kong
National Concord Eng., Ltd.
Unit A-B, 5/F.
Southeast Industrial Building
611-619 Castle Peak Road
Tsuen Wan, N.T.
Phone +852 2429 2611
Fax +852 2429 2164
sales@nce.com.hk

Hungary
WAGO Hungária KFT
Ipári Park, Gyár u. 2
2040 Budapest
Phone +36 23 502-170
Fax +36 23 502-166
info.hu@wago.com

Iceland
S. Gudjonsson ehf.
Audbrekku 9-11
202 Kopavogur
Phone +354 520-4500
Fax +354 520-4501
export@wago.com

India
WAGO Private Limited
C-27, Sector-58, Phase-III
Noida-201 301
Gautam Budh Nagar (U.P)
Phone +91 120 438 8700
Fax +91 120 438 8799
info.india@wago.com

Indonesia
please contact WAGO Singapore

Irak
please contact WAGO Middle East

Ireland
Drives & Controls
Unit F4, Riverview Business Park
Nangor Road
Dublin 12
Phone +353 1 4604474
Fax +353 1 4604507
info@drivesandcontrols.ie

Israel
Comtel Israel Electronic Solutions Ltd.
Bet Hapaamon
20 Hataas Street
P.O. Box 66
44425 Kefar-Saba
Phone +972 9 76 77 240
Fax +972 9 76 77 243
sales@comtel.co.il

Italy
WAGO Elettronica SRL a Socio Unico
Via Parini 1
40033 Casalecchio di Reno (BO)
Phone +39 051 6132112
Fax +39 051 6272174
info-ita@wago.com

Japan
WAGO Co. of JAPAN Ltd.
Kinsicho Prime Tower
1-5-7, Kameido, Koto-ku
Tokyo 136-0071
Phone +81 3 5627 2050
Fax +81 3 5627 2055
info-jp@wago.com

Jordan
Oxgen for Engineering Systems Co. L.L.C
PO Box: 2154 Amman
11953 Jordan
Phone +962 79 9 860 869
Fax +962 655 211 89
info@oxgn-grp.com

Kazakhstan
TOO INTANT
Kinsichov Avenue
050061 Almaty
Phone +7 727 356 52 91/92/93
Fax +7 727 327 14 92/93
ee@intant.net
ees_sm1@intant.net

TOO Technik-Trade
ul. i. A. Protosanova, 81
070004 Ust-Kamenogorsk
Phone +7 7232 254 064
Fax +7 7232 253 251
info@technik.kz

Nova Solut LLC (System Integrator)
050042, The Republic Of Kazakhstan,
Almaty city, Toktabayeva 23, #10
Phone +7 777 206 04 76
director@novasolut.kz
tech@novasolut.kz

Korea
WAGO Korea Co., Ltd.
Room 205 AnyangMegaValley,
268, Hagui-ro, Dongan-gu, Anyang-si,
Gyeonggi-do, 14056, South Korea
Phone +82 31 421 9500
info.korea@wago.com

Kosovo
please contact WAGO Bulgaria

Latvia
INSTABALT LATVIA SIA
Vestienas iela 6
Riga, LV-1035
Phone +371 6790 1188
Fax +371 6790 1180
info@instabalt.lv

Lebanon
Gemayel Trading & Contracting
Rue 55, Antonins Project-Bloc L
P.O. BOX 70-1096
Antelias, Lebanon
Phone +961 3 223 029
Fax +961 4 521 029
info@gtclb.com

Lithuania
INSTABALT LIT UAB
Savanorių 187
Vilnius, 2053
Phone +370 52 322 295
Fax +370 52 322 247
info@instabalt.lt

Luxembourg
please contact WAGO Belgium

Macedonia
please contact WAGO Bulgaria

Komjunet Inzenering
Vladimir Komarov 1A-3/9
1000 Skopje
Phone +389 2 521 12 00

Malaysia

WAGO Representative Office Malaysia
No 806, Block A4, Leisure Commerce Square,
No 9, Jalan PJS 8/9, 46150 Petaling Jaya,
Selangor Darul Ehsan, Malaysia
Phone +60 3 7877 1776
Fax +60 3 7877 2776
kian.guan.tan@wago.com

HPH Materials (M) Sdn Bhd
No. 4, Jalan Nilam 1/6
Suban Hi-Tech Industrial Park
40000 Shah Alam
Selangor, D.E. Malaysia
Phone +60 3 5638 2213
Fax +60 3 5638 8213
info@hphmaterials.com

Maledives

please contact WAGO India

Mexico

WAGO SA de CV
Carretera estatal 431 Km. 2+200
Lote 99 Módulo 6
Parque Industrial Tecnológico Innovsción
Querétaro
El Marqués, Qro. 76246
Phone +52 442 221 5946
Fax +52 442 221 5063
info.mx@wago.com

Moldova

Electroservice Slavinschi TT.
str. Bolgarskaia 9, office 6
2001 Kishinev
Phone +373 22 274427
Fax +373 22 224481
es@es.mldnet.com

Morocco

Automatisme & Connection Maroc
23, Rue Bourred
2ème étage, appt4
Roche Noire
20300 Casablanca
Phone +212 522 24 21 72/73
Fax +212 522 24 21 75
info-fr@wago.com

Nepal

please contact WAGO India

Netherlands

WAGO Nederland B.V.
Laan van de Ram 19
7234 BW APELDOORN
Phone +31 55 36 83 500
Fax +31 55 36 83 599
info-nl@wago.com

New Zealand

please contact WAGO Australia

NHP NZ

7 Lockhart Place
Mt Wellington
Phone +64 9 2761967
Fax +64 9 2761992
export@wago.com

Nigeria

GIL Automations Ltd.
Daily Times Complex
2 Lateef Jakande Rd., Agidingbi
100271 Ikeja, Lagos State
Phone +234 17132672335
sales@gilautomation.com

Norway

WAGO Norge AS
Jerikoveien 20
1067 Oslo
Phone +47 22 30 94 50
Fax +47 22 30 94 51
info.no@wago.com

Oman

please contact WAGO Middle East

Pakistan

FuziLogiX Automation & Control
Suit No. 14, 5th Floor, Shan Arcade
New Garden Town, Lahore
Phone +92 42 594 1503 - 4
Fax +92 42 585 1431
info@fuzilogix.com

S.A. Hamid & Co.
7 Brandreth Road
Lahore, 54000
Phone +92 42 376 500 99
Fax +92 42 376 513 91
sales@sahamid.com

Paraguay

AESA
Av. Madame Lynch
c/Antolin Irala
2309 Asunción
Phone +59 521674524
info@aesa.com.py

Peru

Manufacturas Eléctricas S.A.
Av O.R. Benavides 1215
15000 Lima
Phone +511 6196200
Fax +511 6196247
ventas@manelsa.com.pe

Philippines

please contact WAGO Singapore

Poland

WAGO ELWAG sp. z o. o.
ul. Piękna 58 a
50-506 Wrocław
Phone +48 71 3602970
Fax +48 71 3602999
wago.elwag@wago.com

Portugal

MORGADO & CA. LDA - SEDE
Estrada Exterior da
Circunvalação 3558/3560
Apartado 1057
4435 Rio Tinto
Phone +351 22 9770600
Fax +351 22 9770699
geral@morgadocl.pt

Qatar

GEDB - Gulf European Business
Development - Company W.L.L.)
P.O. Box: 20 000
Doha, Qatar
Phone +974 5591 5682
info@gebdc.com

Romania

WAGO Kontakttechnik GmbH & Co. KG
Representative Office Romania
Sos. Pipera-Tunari nr. 1/1
building 1, 2nd floor
077190 Voluntari, Ilfov
Phone +40-(0)31 421 85 68
info-RO@wago.com

VDR & Servicii srl
Str. Valeriu Braniște, nr. 60, ap.1,
sector 3
Phone +40 21 322 5074/76
Fax +40 21 322 5075
office@componente-automatizari.ro

Russia

OOO WAGO Contact Rus
Dmitrovskoe shosse, 157,
bldg. 12/5
127411 Moscow
Phone +7 495 663-3305
Fax +7 495 663-3308
info.ru@wago.com

OOO Decima
Projesd 4922, d. 4, str. 1
124460 Moscow / Selenograd
Phone +7 495 988 4858
Fax +7 495 988 4858
decima@decima.ru

OOO Prosoft
ul. Profsovnaya, 108
117437 Moscow
Phone +7 495 2340636
Fax +7 495 2340640
info@prosoft.ru

ITC Electronics: Moscow
Radio str. 24
105005 Moscow
Phone +7 495 775 1845
Fax +7 495 775 1848
moscow@itc-electronics.com

WAGO Branch office
Ekaterinburg
Phone +7 343 216 3426

WAGO Branch office
Novosibirsk
Phone +7 383 217 9244

WAGO Branch office
St. Petersburg
Phone +7 812 312 1918

Saudi Arabia

Saudi Electronic Trading
P.O. Box 60712
Riyadh 11555

Serbia

please contact WAGO Bulgaria

ELMAT Elektromaterijal doo.
Savnicka 11
11030 Beograd
Phone +381 11 2500800
Fax +381 11 2515816
office@elmat.rs

Singapore

WAGO Electronic Pte Ltd
7 Tai Seng Drive, #05-02
Singapore 535218
Phone +65 62866776
Fax +65 62842425
info-sing@wago.com

Slovakia

Proelektro spol. s r.o.
Na barine 22
841 03 Bratislava - Lamač
Phone +421 2 4569 2503
info@wago.sk

Slovenia

IC elektronika d.o.o.
Vodovodna cesta 100
1000 Ljubljana
Phone +386 1568 0126
Fax +386 1568 9107
info@ic-elect.si

Elektronabava d.o.o.
Cesta 24 junija 3
1231 Ljubljana
Phone +386 1 58 99 300
Fax +386 1 58 99 409
info@elektronabava.si

Spain

DICOMAT S.L.
Avda. de la Industria, 36
Apartado Correos, 1.178
28108-Alcobendas (Madrid)
Phone +34 91 662 1362
Fax +34 91 661 0089
info@dicomat-asetyc.com

South Africa

Shorrock Automation CC
Nellmapius drive
5 Regency Drive, Route 21 Corp. Park
0051 Centurion
Phone +27 12 4500300
Fax +27 12 4500322
sales@shorrock.co.za

Sri Lanka

please contact WAGO India

Sweden

WAGO Sverige AB
Box 11127, 161 11 BROMMA
Besöksadress: Adolfsbergsv. 31
Phone +46 858410680
info.se@wago.com

Switzerland

WAGO CONTACT SA
Rte. de l'Industrie 19
Case Postale 168
1564 Domdidier
Phone +41/26 676 75 00
Fax +41/26 676 75 01
info.switzerland@wago.com

Syria

Zahabi Co.
8/5 Shouhadaa St., P.O. Box 8262
Aleppo
Phone +963 21 21 22 235 / 6
Fax +963 21 21 22 23 7
info.uae@wago.com

Taiwan R.O.C.

WAGO Contact, Ltd.
5F., No.168, Jianshang Rd
Zhonghe City
Taipei County 23585, Taiwan
Phone +886 2 2225 0123
Fax +886 2 2225 1511
info.taiwan@wago.com

Thailand

WAGO Representative Office Thailand
4th Floor, KS Building
213/6-8 Rachada-Phisek Road
Dingdaeng, Bangkok 10400
Phone +66 2 6935611
Fax +66 2 6935612
warongkon.khankham@wago.com

US Power Distribution Co., Ltd.
4th Floor, KS Building
213/6-8 Rachada-Phisek Road
Dingdaeng, Bangkok 10400

Thailand

Itthirith Technology Co., Ltd.
Vision Business Park 2 Floor 4
Soi Raminthra 55/8, Watcharapon R
Tharaeng, Bangkok District
Bangkok Thailand 10220
Phone +66 2 347 0780
Fax +66 2 347 0772
sales@itthiritechnology.com

Tunisia

please contact WAGO France

Turkey

WAGO Elektronik Sanayi ve Ticaret I
Yukari Dudullu Mahallesi Bayraktar E
Cad. Hattat Sok. No. 10
34775 Ümraniye - Istanbul
Phone +90 216 472 1133
Fax +90 216 472 9910
info.tr@wago.com

Ukraine

NPP Logicon
Predslavinskaya street, 39, office 3C
03150 Kiev
Phone +380 44 5228019
Fax +380 44 2611803
info@logicon.ua

OOO Micropribor

ul. Kotelnikova, 4
03115 Kiev
Phone +380 44 5369386
Fax +380 44 5369387
sales@micropribor.kiev.ua

United Arab Emirates (UAE)

WAGO Middle East (FZC)
SAIF Zone, Q4-282
P.O. Box 120665
Sharjah, UAE
Phone +971 6 5579920
Fax +971 6 5579921
info.uae@wago.com

Uruguay

Fivisa Electricidad
Avda. Uruguay 1274
11100 Montevideo
Phone +59 829 020 808
Fax +59 829 021 230
info@fivisa.com.uy

USA

WAGO CORPORATION
N120 W19129 Freistadt Road
Germantown, WI 53022
Phone +1 262 255 6222
Fax +1 262 255 3232
Toll-Free: 1-800 DIN Rail (346-7245)
info.us@wago.com

Venezuela

PETROBORNAS, C.A.
C.C. PLAZA AEROPUERTO - PISO 1
P1-B-03
(8015) UNARE - PUERTO ORDAZ -
ESTADO BOLÍVAR
REPÚBLICA BOLIVARIANA DE
VENEZUELA
Phone +58 286 951 3382
Fax +58 286 951 3382
info@petrobornas.com


Vietnam

please contact WAGO Germany (Mir

Version: 02/2018

Current addresses at www.wago.com

Notes

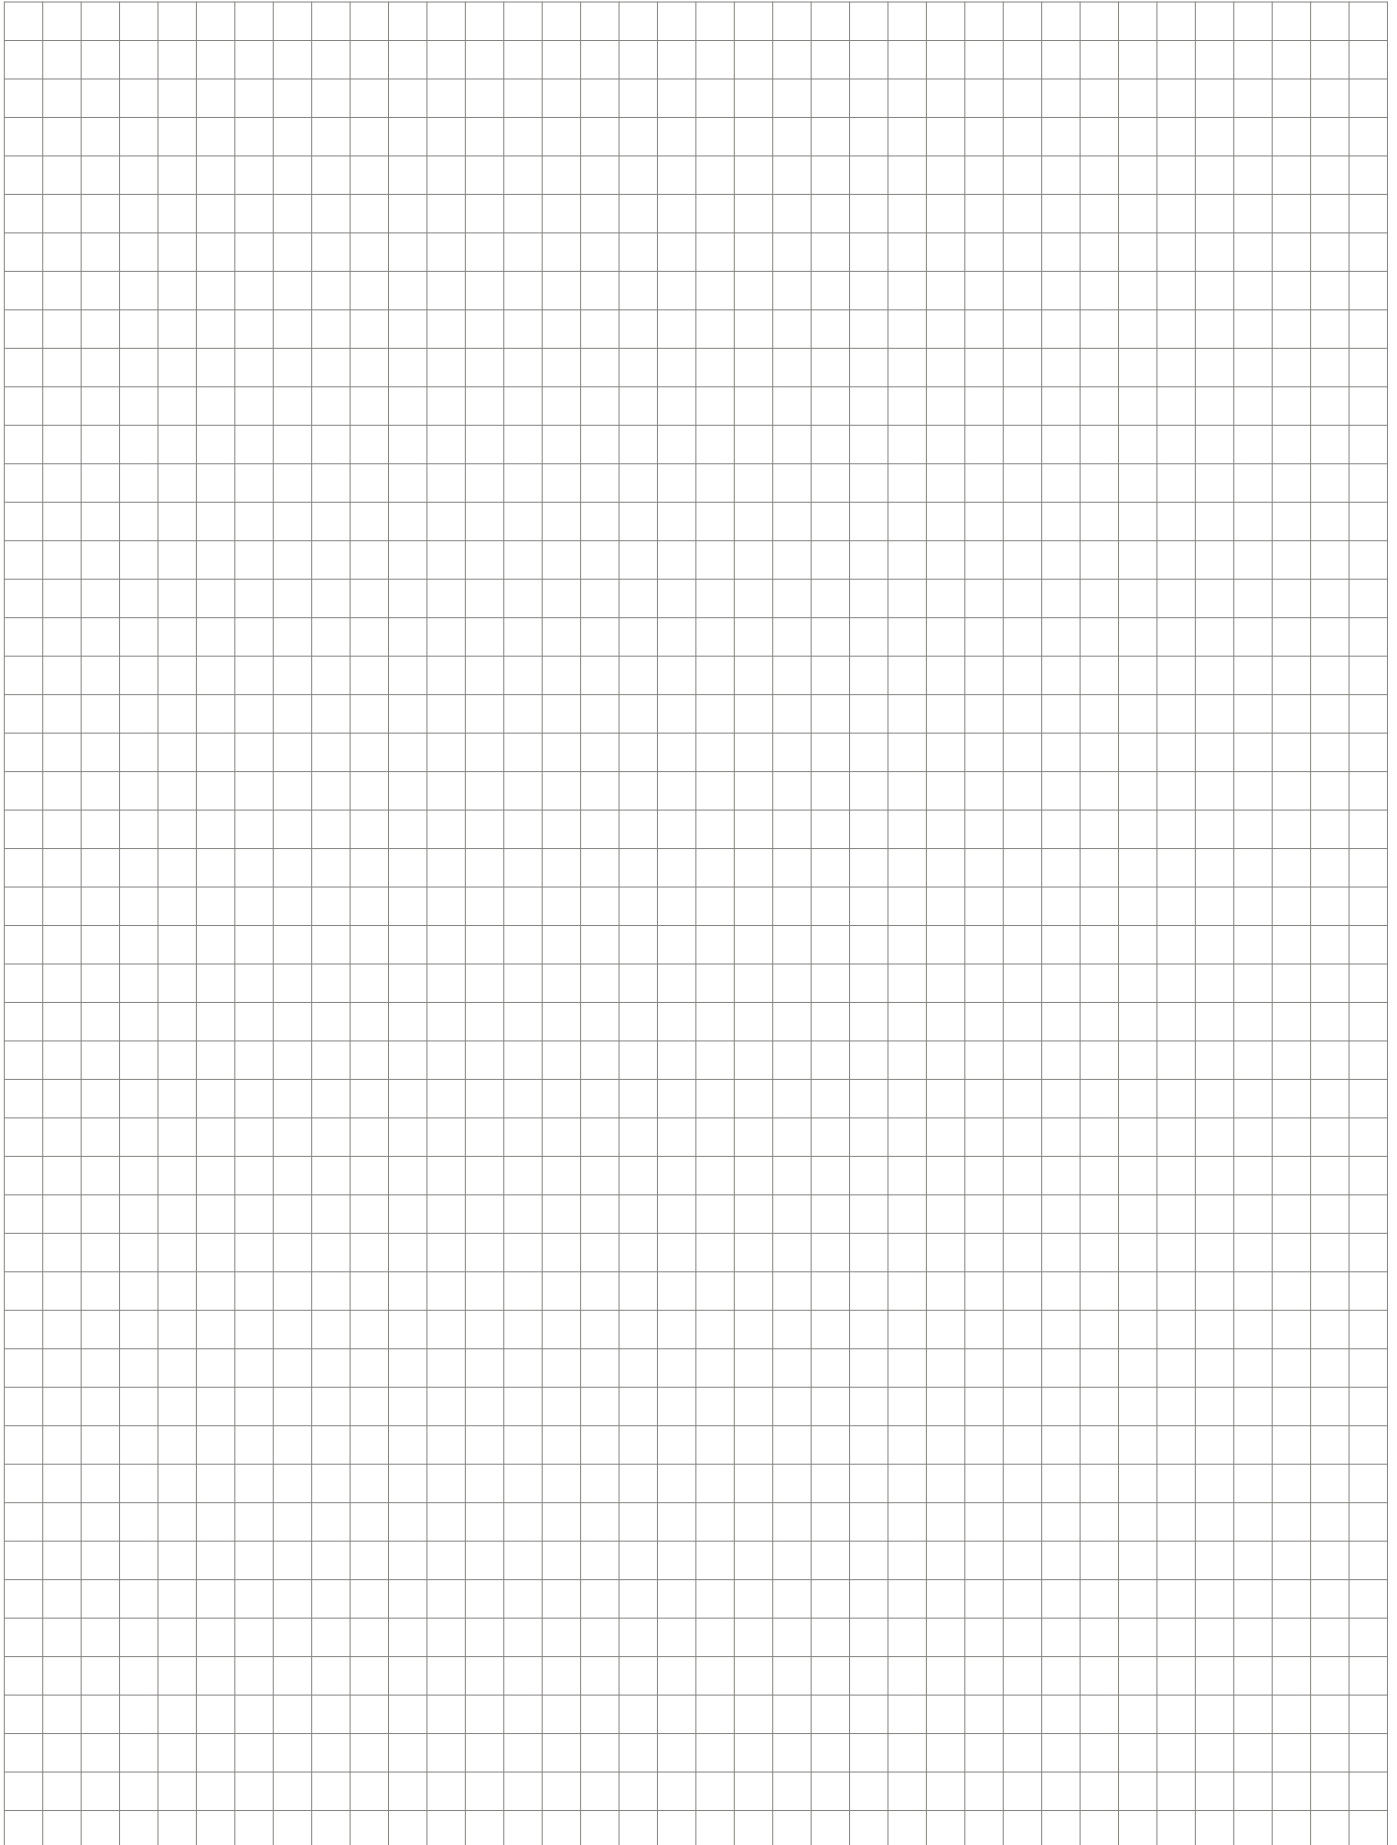

WAGO Kontakttechnik GmbH & Co. KG

Postfach 2880 · D · 32385 Minden
Hansastraße 27 · D · 32423 Minden
info@wago.com
www.wago.com

Headquarters	+49 571 887 - 0
Sales	+49 571 887 - 44222
Order Service	+49 571 887 - 44333
Fax	+49 571 887 - 844169